

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : C11D 3/37, 3/28, 3/30 C11D 11/00	A1	(11) International Publication Number: WO 94/11482 (43) International Publication Date: 26 May 1994 (26.05.94)
(21) International Application Number: PCT/US93/10451 (22) International Filing Date: 2 November 1993 (02.11.93) (30) Priority data: 07/976,781 16 November 1992 (16.11.92) US (71) Applicant: THE PROCTER & GAMBLE COMPANY [US/US]; One Procter & Gamble Plaza, Cincinnati, OH 45202 (US). (72) Inventors: TRINH, Toan ; 8671 Creekwood Lane, Maineville, OH 45039 (US). SUNG, Stephanie, Lin-Lin ; 11610 Timber Ridge Lane #6, Cincinnati, OH 45241 (US). TORDIL, Helen, Bernardo ; 7590 West Chester Road, West Chester, OH 45069 (US). WENDLAND, Paul, Arthur ; 1317 Edwards Road, Cincinnati, OH 45208 (US).		(74) Agents: REED, T., David et al.; The Procter & Gamble Company, 5299 Spring Grove Avenue, Cincinnati, OH 45217 (US). (81) Designated States: CA, HU, JP, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>
(54) Title: FABRIC SOFTENING COMPOSITIONS WITH DYE TRANSFER INHIBITORS FOR IMPROVED FABRIC APPEARANCE (57) Abstract The present invention relates to compositions and processes which incorporate water-soluble polymers, other than enzymes, containing = N-C(= O)- (including PVP) and/or N-oxide groups into the wash, rinse, and/or drying cycle of a laundering process (e.g., via fabric softening compositions) for dye transfer inhibition in the subsequent wash cycle. Multiple wash cycles optimize the dye transfer inhibitor performance of these polymers, remove unwanted dye discoloration caused by dye transfer, and provide soil antiredeposition benefits.		

- 1 -

FABRIC SOFTENING COMPOSITIONS WITH DYE TRANSFER INHIBITORS
FOR IMPROVED FABRIC APPEARANCE

5

TECHNICAL FIELD

10 The present invention relates to compositions and processes useful for inhibiting the transfer of dyes, released into laundering solution from colored fabrics, from one fabric to another.

BACKGROUND ART

15 One troublesome and persistent problem during laundering operations is the tendency of some colored fabrics to release dye into the laundering solution which dye is then transferred onto other fabrics.

20 Manufacturers use many types of dye to color fabrics. Common fabric dyes include direct dyes used primarily to color cotton and rayon, acid dyes used primarily on nylon, wool, and silk, disperse dyes used primarily on polyester, nylon, and Spandex, azo dyes used primarily on cotton, rayon, and silk, reactive dyes used primarily on cotton and rayon, and vat dyes used primarily on cotton. Direct, acid and disperse dyes are in general readily released into washing solution while azo and vat dyes are not. When properly applied, reactive dyes chemically bond to cellulose and therefore are not readily solubilized; however, if improperly applied, reactive dyes may also release into the wash solution. Cotton, nylon, rayon and Spandex fabrics have a strong propensity to pick up solubilized or suspended dyes from solution, while polyester fabrics pick up such dyes to a lesser extent.

25 In the laundry operation, especially the operation involving automatic washing machines, dye transfer occurs mainly during the wash cycle, and very seldom, if at all, during the rinse cycle.
30 Dye transfer during the wash cycle is caused by higher water
35

- 4 -

- (B) polymers with one or more monomeric units containing at least one N-oxide group having an average molecular weight of from about 500 to about 1,000,000, preferably from about 1,000 to about 500,000, more preferably from about 2,000 to about 100,000;
- (C) polymers containing both =N-C(=O)- and N-oxide groups of (A) and (B);
- (D) mixtures thereof; and

III. the balance comprising a liquid carrier, preferably water; wherein the liquid compositions are essentially free of aerosol propellants. The nitrogen of the =N-C(=O)- group may be bonded to either one or two other atoms (with two single bonds or one double bond).

The present invention also comprises dryer-added fabric softener compositions comprising:

- I. from about 50% to about 99%, preferably from about 70% to about 99%, of fabric softening agent;
- II. from about 0.2% to about 50%, preferably from about 1% to about 30%, of polymeric dye transfer inhibiting agent selected from (A), (B), (C), and (D), above; and
- III. optionally, a dispensing means which provides for release of an effective amount of said composition to fabrics.

Solid, particulate fabric softening compositions of the present invention typically comprise:

- I. from about 20% to about 90%, preferably from about 30% to about 70%, of fabric softening agent; and
- II. from about 0.1% to about 80%, preferably from about 0.3% to about 50%, more preferably from about 0.5% to about 25%, of dye transfer inhibiting agent also selected from (A), (B), (C), and (D), above.

DETAILED DESCRIPTION OF THE INVENTION

LIQUID COMPOSITIONS

Liquid, preferably aqueous, fabric softening compositions typically comprise the following components:

- I. an effective amount, preferably from about 3% to about 50%, more preferably from about 4% to about 30%, of fabric softening agent;

- 3 -

remain deposited on fabrics throughout consumer wear so that there is a sufficient concentration, after resolubilization in the subsequent wash solution, to inhibit dye transfer. Non-treated fabrics will also be protected from dye transfer when washed with
5 fabrics previously treated with these softener compositions containing polymeric dye transfer inhibitors. It is also surprising that these polymer compounds in softener compositions show improved efficacy when anionic detergents rather than nonionic detergents are used in the subsequent wash cycle.

10 Thus, the present invention relates primarily to fabric softening compositions, in liquid, solid, or dryer sheet form, for use in the rinse and/or dryer cycles of home laundry operations. The present invention is based on: (a) the discovery that the incorporation of an effective amount of certain polymeric dye
15 transfer inhibitors (DTI) into liquid, solid, and/or dryer-added fabric softening compositions can effectively inhibit the transfer of dyes from one fabric to another in the subsequent wash cycle; and/or (b) the discovery of a process of incorporating DTI into fabric softener compositions to provide convenient and/or optimal
20 dye transfer inhibition, remove unwanted dye discoloration resulting from previous dye transfer, and/or provide soil anti-redeposition benefit in the wash cycle.

Preferably, and more specifically, fabric softening compositions are provided in the form of liquid, preferably aqueous,
25 compositions comprising:

- I. from about 3% to about 50%, preferably from about 4% to about 30%, of fabric softening agent (fabric softener); and
- II. from about 0.03% to about 25%, preferably from about 0.1% to about 15%, of water-soluble polymeric dye transfer inhibiting
30 agent (dye transfer inhibitor or DTI) selected from the group consisting of:
 - (A) polymers with one or more monomeric units containing at least one $-N-C(=O)-$ group, which are not enzymes, having an average molecular weight of from about 500 to about
35 100,000, preferably about 500 to about 40,000, and more preferably from about 1,000 to about 30,000;

- 6 -

(c) from about 10% to about 80% of cationic nitrogenous salts having two or more long chain acyclic aliphatic C₁₅-C₂₂ hydrocarbon groups or one said group and an arylalkyl group;

5 said (a), (b) and (c) percentages being by weight of Component I.

Following are the general descriptions of the above softener ingredients including certain specific examples. These examples illustrate, but do not limit the present invention.


10

Component I(a)

A preferred softening agent (active) of the present invention is the reaction products of higher fatty acids with a polyamine selected from the group consisting of hydroxyalkylalkylenediamines and dialkylenetriamines and mixtures thereof. These reaction products are mixtures of several compounds in view of the multi-functional structure of the polyamines.


The preferred Component I(a) is a nitrogenous compound selected from the group consisting of the reaction product mixtures or some selected components of the mixtures. More specifically, the preferred Component I(a) is compounds selected from the group consisting of:

(i) the reaction product of higher fatty acids with hydroxyalkylalkylenediamines in a molecular ratio of about 2:1, said reaction product containing a composition having a compound of the formula:

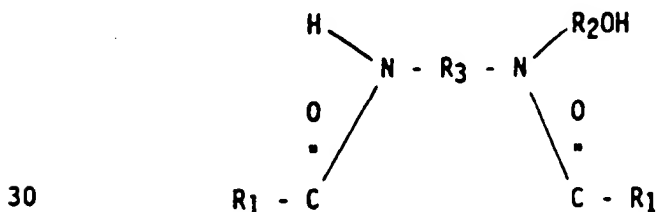

wherein R₁ is an acyclic aliphatic C₁₅-C₂₁ hydrocarbon group and R₂ and R₃ are divalent C₁-C₃ alkylene groups;

(ii) substituted imidazoline compounds having the formula:

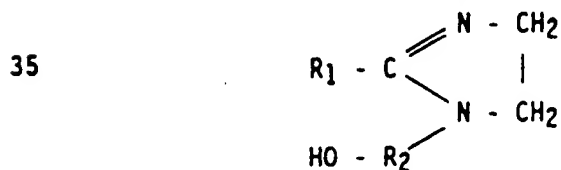

- 5 -

- II. an effective amount, preferably from about 0.03% to about 25%, more preferably from about 0.1% to about 15%, of polymeric dye transfer inhibiting agent; and
- III. the balance comprising liquid carrier, preferably, selected from the group consisting of water, C₁-C₄ monohydric alcohols, C₂-C₆ polyhydric alcohols, liquid polyalkylene glycols, and mixtures thereof.

I. Fabric Softening Agents

The amount of fabric softening agent (fabric softener) in liquid compositions of this invention is typically from about 3% to about 50%, preferably from about 4% to about 30%, by weight of the composition. The lower limits are amounts needed to contribute effective fabric softening performance when added to laundry rinse baths in the manner which is customary in home laundry practice. The higher limits are suitable for concentrated products which provide the consumer with more economical usage due to a reduction of packaging and distributing costs.

Some preferred compositions are disclosed in U.S. Pat. No. 4,661,269, issued April 28, 1987, in the names of Toan Trinh, Errol H. Wahl, Donald M. Swartley, and Ronald L. Hemingway, said patent being incorporated herein by reference.

Other fabric softeners that can be used herein are disclosed in U.S. Pat. Nos.: 3,861,870, Edwards and Diehl; 4,308,151, Cambre; 3,886,075, Bernardino; 4,233,164, Davis; 4,401,578, Verbruggen; 3,974,076, Wiersema and Rieke; and 4,237,016, Rudkin, Clint, and Young, all of said patents being incorporated herein by reference.

One suitable fabric softener (Component I) is a mixture comprising:

- (a) from about 10% to about 80% of the reaction product of higher fatty acids with a polyamine selected from the group consisting of hydroxyalkylalkylenediamines and dialkylenetriamines and mixtures thereof;
- (b) from about 3% to about 40% of cationic nitrogenous salts containing only one long chain acyclic aliphatic C₁₅-C₂₂ hydrocarbon group; and

- 8 -

trade names of Alkazine® ST by Alkaril Chemicals, Inc., or Schercozoline® S by Scher Chemicals, Inc.

An example of Component I(a)(iv) is N,N"-ditallowalkoyldiethylenetriamine where R₁ is an aliphatic C₁₅-C₁₇ hydrocarbon group and R₂ and R₃ are divalent ethylene groups.

An example of Component I(a)(v) is 1-tallowamidoethyl-2-tallowimidazoline wherein R₁ is an aliphatic C₁₅-C₁₇ hydrocarbon group and R₂ is a divalent ethylene group.


The Components I(a)(iii) and I(a)(v) can also be first dispersed in a Bronsted acid dispersing aid having a pK_a value of not greater than about 4; provided that the pH of the final composition is not greater than about 5. Some preferred dispersing aids are hydrochloric acid, phosphoric acid, or methanesulfonic acid.

Both N,N"-ditallowalkoyldiethylenetriamine and 1-tallow(amidoethyl)-2-tallowimidazoline are reaction products of tallow fatty acids and diethylenetriamine, and are precursors of the cationic fabric softening agent methyl-1-tallowamidoethyl-2-tallowimidazolinium methanesulfate (see "Cationic Surface Active Agents as Fabric Softeners," R. R. Egan, Journal of the American Oil Chemicals' Society, January 1978, pages 118-121). N,N"-ditallowalkoyldiethylenetriamine and 1-tallowamidoethyl-2-tallowimidazoline can be obtained from Sherex Chemical Company as experimental chemicals. Methyl-1-tallowamidoethyl-2-tallowimidazolinium methanesulfate is sold by Sherex Chemical Company under the trade name Varisoft® 475.

Component I(b)

The preferred Component I(b) is a cationic nitrogenous salt containing one long chain acyclic aliphatic C₁₅-C₂₂ hydrocarbon group selected from the group consisting of:


(i) acyclic quaternary ammonium salts having the formula:

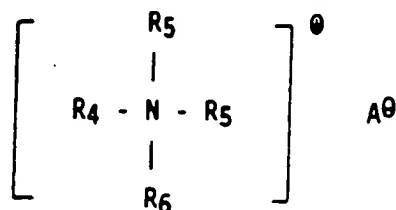

- 7 -


wherein R₁ and R₂ are defined as above;

(iii) substituted imidazoline compounds having the formula:

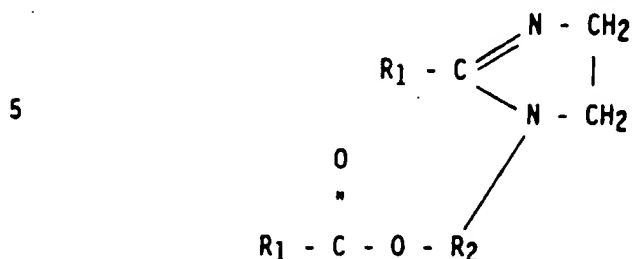


wherein R₁ and R₂ are defined as above;

10 (iv) the reaction product of higher fatty acids with dialkylenetriamines in a molecular ratio of about 2:1, said reaction product containing a composition having a compound of the formula:



wherein R₁, R₂ and R₃ are defined as above; and

(v) substituted imidazoline compounds having the formula:

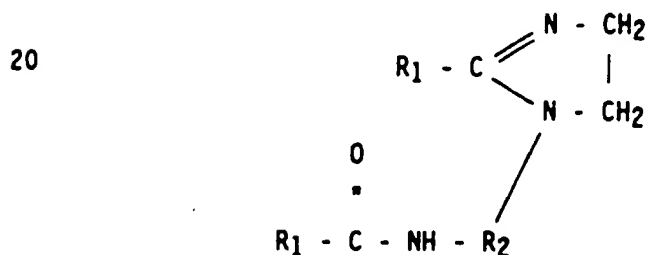

25 wherein R₁ and R₂ are defined as above; and

(vi) mixtures thereof.


30 Component I(a)(i) is commercially available as Mazamide® 6, sold by Mazer Chemicals, or Ceranine® HC, sold by Sandoz Colors & Chemicals; here the higher fatty acids are hydrogenated tallow fatty acids and the hydroxyalkylalkylenediamine is N-2-hydroxy-ethylethylenediamine, and R₁ is an aliphatic C₁₅-C₁₇ hydrocarbon group, and R₂ and R₃ are divalent ethylene groups.

35 An example of Component I(a)(ii) is stearic hydroxyethyl imidazoline wherein R₁ is an aliphatic C₁₇ hydrocarbon group, R₂ is a divalent ethylene group; this chemical is sold under the

- 10 -

wherein R_1 is an acyclic aliphatic C_{15} - C_{21} hydrocarbon group, R_2 is a divalent C_1 - C_3 alkylene group, and A^θ is an ion group;

(vi) monoester quaternary ammonium compounds having the formula:



wherein

each $Y = -O-(O)C-$, or $-C(O)-O-$;

each $n = 1$ to 4 ;

each R substituent is a short chain C_1 - C_6 , preferably C_1 - C_3 alkyl or hydroxyalkyl group, e.g., methyl (most preferred), ethyl, propyl, hydroxyethyl, and the like, benzyl or mixtures thereof;

R^2 is a long chain C_{10} - C_{22} hydrocarbyl, or substituted hydrocarbyl substituent, preferably C_{15} - C_{19} alkyl and/or alkenyl, most preferably C_{15} - C_{18} straight chain alkyl and/or alkenyl; and

the counterion, A^θ , can be any softener-compatible anion, for example, chloride, bromide, methylsulfate, formate, sulfate, nitrate and the like; and

(vii) mixtures thereof.

Examples of Component I(b)(i) are the monoalkyltrimethylammonium salts such as monotallowtrimethylammonium chloride, mono(hydrogenated tallow)trimethylammonium chloride, palmityltrimethylammonium chloride and soyatrimethylammonium chloride, sold by Sherex Chemical Company under the trade name Adogen® 471, Adogen® 441, Adogen® 444, and Adogen® 415, respectively. In these salts, R_4 is an acyclic aliphatic C_{16} - C_{18} hydrocarbon group, and R_5 and R_6 are methyl groups. Mono(hydrogenated tallow)trimethylammonium chloride and monotallowtrimethylammonium chloride are preferred. Other examples of Component I(b)(i) are behenyltrimethylammonium chloride wherein R_4 is a C_{22} hydrocarbon group and sold under the trade name Kemamine® Q2803-C by Humko Chemical Division of Witco Chemical Corporation; soyadimethylethylammonium ethylsulfate wherein R_4 is a C_{16} - C_{18} hydrocarbon group, R_5 is a methyl group,


- 9 -

wherein R₄ is an acyclic aliphatic C₁₅-C₂₂ hydrocarbon group, R₅ and R₆ are C₁-C₄ saturated alkyl or hydroxyalkyl groups, and A^Θ is an anion;

(ii) substituted imidazolinium salts having the formula:

5

10

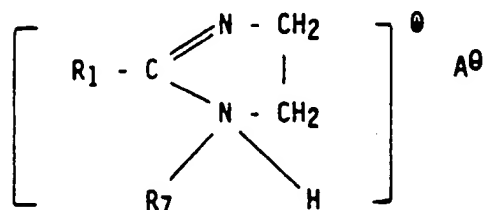


wherein R₁ is an acyclic aliphatic C₁₅-C₂₁ hydrocarbon group, R₇ is a hydrogen or a C₁-C₄ saturated alkyl or hydroxyalkyl group, and A^Θ is an anion;

(iii) substituted imidazolinium salts having the formula:

15


20

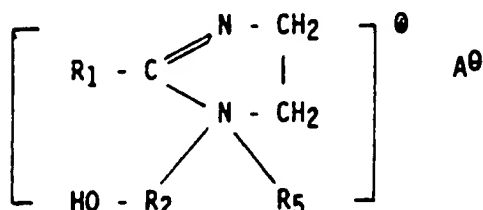

wherein R₂ is a divalent C₁-C₃ alkylene group and R₁, R₅ and A^Θ are as defined above;

(iv) alkyipyridinium salts having the formula:

25

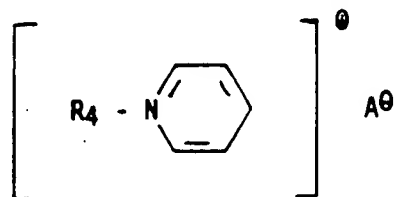


wherein R₄ is an acyclic aliphatic C₁₆-C₂₂ hydrocarbon group and A^Θ is an anion; and

30


(v) alkanamide alkylene pyridinium salts having the formula:

35

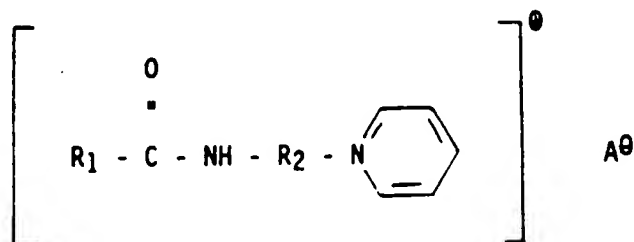


- 12 -

(ii) diamido quaternary ammonium salts having the formula:

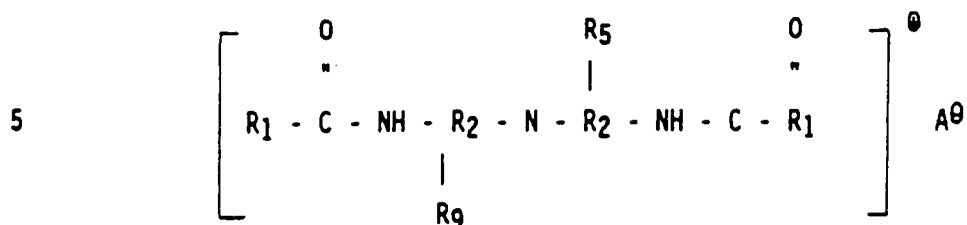


wherein R₁ is an acyclic aliphatic C₁₅-C₂₁ hydrocarbon group, R₂ is a divalent alkylene group having 1 to 3 carbon atoms, R₅ and R₉ are C₁-C₄ saturated alkyl or hydroxyalkyl groups, and A[⊖] is an anion;

(iii) diamino alkoxyated quaternary ammonium salts having the formula:

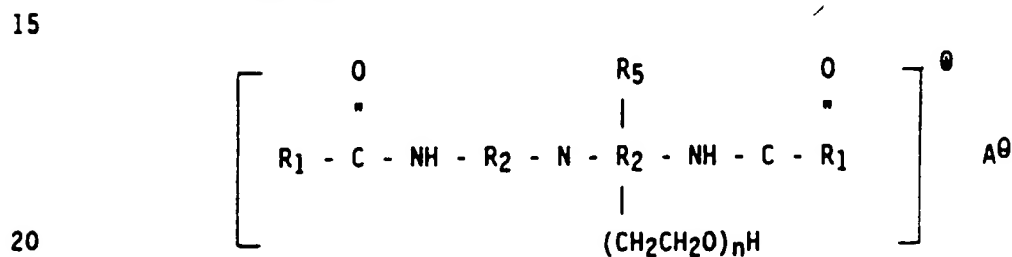

wherein n is equal to 1 to about 5, and R₁, R₂, R₅ and A[⊖] are as defined above;

(iv) quaternary ammonium compounds having the formula:

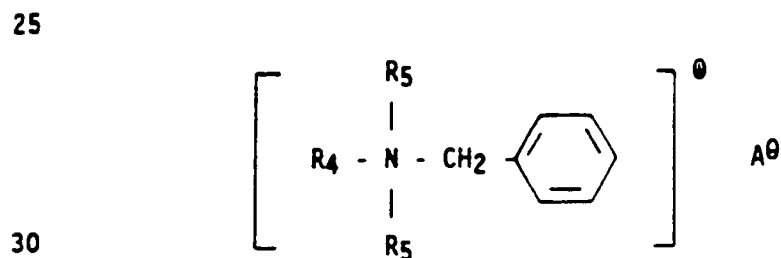

wherein R₄ is an acyclic aliphatic C₁₅-C₂₂ hydrocarbon group, R₅ is a C₁-C₄ saturated alkyl or hydroxyalkyl group, A[⊖] is an anion;

- 11 -

R₆ is an ethyl group, and A^Θ is an ethylsulfate anion, sold under the trade name Jordaquat® 1033 by Jordan Chemical Company; and methyl-bis(2-hydroxyethyl)octadecylammonium chloride wherein R₄ is a C₁₈ hydrocarbon group, R₅ is a 2-hydroxyethyl group and R₆ is a methyl group and available under the trade name Ethoquad® 18/12 from Armak Company.


An example of Component I(b)(iii) is 1-ethyl-1-(2-hydroxyethyl)-2-isoheptadecylimidazolinium ethylsulfate wherein R₁ is a C₁₇ hydrocarbon group, R₂ is an ethylene group, R₅ is an ethyl group, and A^Θ is an ethylsulfate anion. It is available from Mona Industries, Inc., under the trade name Monaquat® ISIES.

An example of Component I(b)(vi) is mono(tallowoyloxyethyl)-hydroxyethyldimethylammonium chloride, i.e., monoester of tallow fatty acid with di(hydroxyethyl)dimethylammonium chloride, a by-product in the process of making diester of tallow fatty acid with di(hydroxyethyl)dimethylammonium chloride, i.e., di(tallowoyloxyethyl)dimethylammonium chloride, a I(c)(vii) component (vide infra).

Component I(c)

Preferred cationic nitrogenous salts having two or more long chain acyclic aliphatic C₁₅-C₂₂ hydrocarbon groups or one said group and an arylalkyl group which can be used either alone or as part of a mixture are selected from the group consisting of:

(i) acyclic quaternary ammonium salts having the formula:

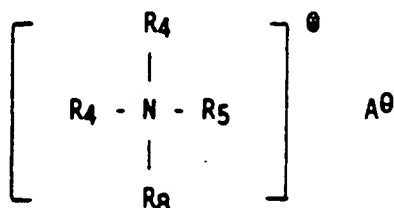

wherein R₄ is an acyclic aliphatic C₁₅-C₂₂ hydrocarbon group, R₅ is a C₁-C₄ saturated alkyl or hydroxyalkyl group, R₈ is selected from the group consisting of R₄ and R₅ groups, and A^Θ is an anion defined as above;

- 14 -

the counterion, A^{\ominus} , can be any softener-compatible anion, for example, chloride, bromide, methylsulfate, formate, sulfate, nitrate and the like; and

(viii) mixtures thereof.

5 Examples of Component I(c)(i) are the well-known dialkyldimethylammonium salts such as ditallowdimethylammonium chloride, ditallowdimethylammonium methylsulfate, di(hydrogenated tallow)dimethylammonium chloride, distearyldimethylammonium chloride, dibehenyldimethylammonium chloride. Di(hydrogenated tallow)di-
10 methylammonium chloride and ditallowdimethylammonium chloride are preferred. Examples of commercially available dialkyldimethylammonium salts usable in the present invention are di(hydrogenated tallow)dimethylammonium chloride (trade name Adogen® 442), ditallowdimethylammonium chloride (trade name Adogen® 470), distearyl-
15 dimethylammonium chloride (trade name Arosurf® TA-100), all available from Sherex Chemical Company. Dibehenyldimethylammonium chloride wherein R_4 is an acyclic aliphatic C_{22} hydrocarbon group is sold under the trade name Kemamine Q-2802C by Humko Chemical Division of Witco Chemical Corporation.


20 Examples of Component I(c)(ii) are methylbis(tallowamidoethyl)(2-hydroxyethyl)ammonium methylsulfate and methylbis(hydrogenated tallowamidoethyl)(2-hydroxyethyl)ammonium methylsulfate wherein R_1 is an acyclic aliphatic C_{15} - C_{17} hydrocarbon group, R_2 is an ethylene group, R_5 is a methyl group, R_9 is a hydroxyalkyl
25 group and A^{\ominus} is a methylsulfate anion; these materials are available from Sherex Chemical Company under the trade names Varisoft® 222 and Varisoft® 110, respectively.

30 An example of Component I(c)(iv) is dimethylstearylbenzylammonium chloride wherein R_4 is an acyclic aliphatic C_{18} hydrocarbon group, R_5 is a methyl group and A^{\ominus} is a chloride anion, and is sold under the trade names Varisoft® SDC by Sherex Chemical Company and Ammonyx® 490 by Onyx Chemical Company.

35 Examples of Component I(c)(v) are 1-methyl-1-tallowamidoethyl-2-tallowimidazolinium methylsulfate and 1-methyl-1-(hydrogenated tallowamidoethyl)-2-(hydrogenated tallow)imidazolinium methylsulfate wherein R_1 is an acyclic aliphatic C_{15} - C_{17} hydro-


- 13 -

(v) substituted imidazolinium salts having the formula:

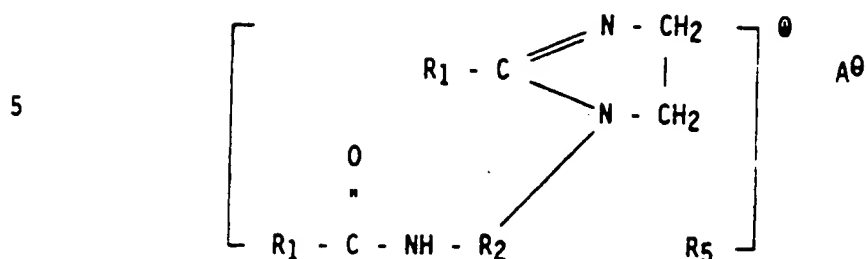


10 wherein R_1 is an acyclic aliphatic C_{15} - C_{21} hydrocarbon group, R_2 is a divalent alkylene group having 1 to 3 carbon atoms, and R_5 and A^\ominus are as defined above; and

(vi) substituted imidazolinium salts having the formula:

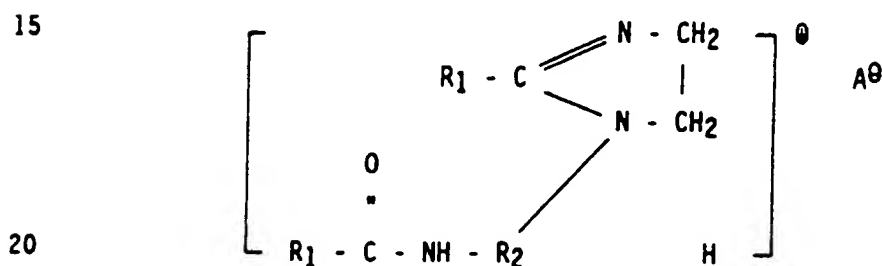

wherein R_1 , R_2 and A^\ominus are as defined above;

(vii) diester quaternary ammonium (DEQA) compounds having the formula:



wherein

each $\text{Y} = -\text{O}-(\text{O})\text{C}-$, or $-\text{C}(\text{O})-\text{O}-$;

$m = 2$ or 3 ;

each $n = 1$ to 4 ;


30 each R substituent is a short chain C_1 - C_6 , preferably C_1 - C_3 alkyl or hydroxyalkyl group, e.g., methyl (most preferred), ethyl, propyl, hydroxyethyl, and the like, benzyl, or mixtures thereof;

35 each R^2 is a long chain C_{10} - C_{22} hydrocarbyl, or substituted hydrocarbyl substituent, preferably C_{15} - C_{19} alkyl and/or alkenyl, most preferably C_{15} - C_{18} straight chain alkyl and/or alkenyl; and

- 16 -

compounds are disclosed in U.S. Pat. No. 4,767,547, Straathof and Konig, issued Aug. 30, 1988, and is incorporated herein by reference.

The diester quaternary ammonium fabric softening compound
5 (DEQA) of I(c)(vii) can also have the general formula:



wherein each R, R², and A[⊖] have the same meanings as before. Such
10 compounds include those having the formula:



where $\cdot OC(O)R^2$ is derived from soft tallow and/or hardened tallow fatty acids.

Preferably each R is a methyl or ethyl group and preferably
15 each R² is in the range of C₁₅ to C₁₉. Degrees of branching, substitution and/or non-saturation can be present in the alkyl chains. The anion A[⊖] in the molecule is preferably the anion of a strong acid and can be, for example, chloride, bromide, iodide, sulphate, and methyl sulphate; the anion can carry a double charge
20 in which case A[⊖] represents half a group. These compounds, in general, are more difficult to formulate as stable concentrated liquid compositions.

These types of compounds and general methods of making them are disclosed in U.S. Pat. No. 4,137,180, Naik et al., issued
25 Jan. 30, 1979, which is incorporated herein by reference.

A preferred composition contains Component I(a) at a level of from about 10% to about 80%, Component I(b) at a level of from about 3% to about 40%, and Component I(c) at a level of from about 10% to about 80%, by weight of said Component I. A more preferred
30 composition contains Component I(c) which is selected from the group consisting of: (i) di(hydrogenated tallow)dimethylammonium chloride; (v) methyl-1-tallowamidoethyl-2-tallowimidazolinium methylsulfate; (vii) diethanol ester dimethylammonium chloride; and mixtures thereof.


35 An even more preferred composition contains Component I(a): the reaction product of about 2 moles of hydrogenated tallow fatty acids with about 1 mole of N-2-hydroxyethylethylenediamine and is

- 15 -

carbon group, R₂ is an ethylene group, R₅ is a methyl group and A^Θ is a chloride anion; they are sold under the trade names Varisoft® 475 and Varisoft® 445, respectively, by Sherex Chemical Company.

It will be understood that for I(c)(vii) above substituents R and R² can optionally be substituted with various groups such as alkoxy or hydroxyl groups, and/or can be saturated, unsaturated, straight, and/or branched so long as the R² groups maintain their basically hydrophobic character. Preferred softening compounds are biodegradable such as those in Component I(c)(vii). These preferred compounds can be considered to be diester variations of ditallow dimethyl ammonium chloride (DTOMAC), which is a widely used fabric softener.

The following are non-limiting examples of I(c)(vii) (wherein all long-chain alkyl substituents are straight-chain):

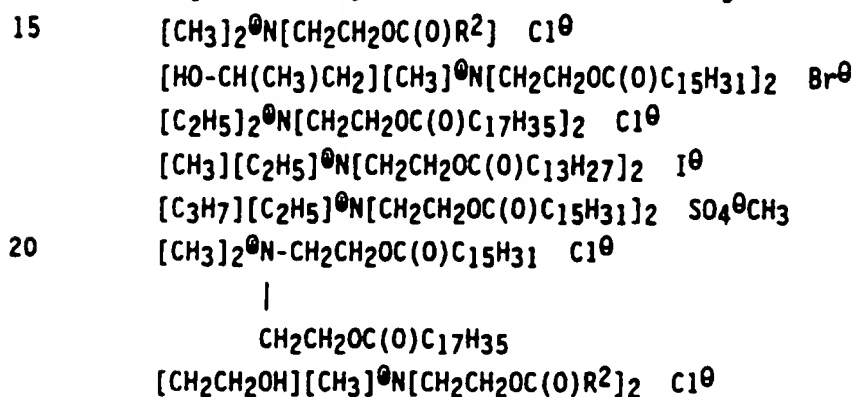

where -C(O)R² is derived from soft tallow and/or hardened tallow fatty acids. Especially preferred is diester of soft and/or hardened tallow fatty acids with di(hydroxyethyl)dimethylammonium chloride, also called di(tallowoyloxyethyl)dimethylammonium chloride.

Since the foregoing compounds (diesters) are somewhat labile to hydrolysis, they should be handled rather carefully when used to formulate the compositions herein. For example, stable liquid compositions herein are formulated at a pH in the range of about 2 to about 5, preferably from about 2 to about 4.5, more preferably from about 2 to about 4. The pH can be adjusted by the addition of a Bronsted acid. pH ranges for making stable softener compositions containing diester quaternary ammonium fabric softening


- 18 -

Dye transfer inhibitors useful in the present invention include water-soluble polymers containing nitrogen and oxygen atoms, selected from the group consisting of:




- (A) polymers, which are not enzymes, with one or more monomeric units containing at least one =N-C(=O)- group;
- (B) polymers with one or more monomeric units containing at least one N-oxide group;
- (C) polymers containing both =N-C(=O)- and N-oxide groups of (A) and (B);
- (D) mixtures thereof;

wherein the nitrogen of the =N-C(=O)- group can be bonded to either one or two other atoms (i.e., can have two single bonds or one double bond).

Dye transfer inhibitors useful in the present invention include water-soluble polymers having the structure:



wherein each P is selected from homopolymerizable and copolymerizable moieties which attach to form the polymer backbone, preferably each P being selected from the group consisting of: vinyl moieties, e.g., [-C(R)₂-C(R)₂-]; other monomeric moieties, e.g., [[C(R)₂]_x-L-], wherein each x is an integer from 1 to 6 and each L is independently selected from the group consisting of:



- 17 -

present at a level of from about 20% to about 70% by weight of Component I; Component I(b): mono(hydrogenated tallow)trimethylammonium chloride present at a level of from about 3% to about 30% by weight of Component I; Component I(c): selected from the group consisting of di(hydrogenated tallow)dimethylammonium chloride, ditallowdimethylammonium chloride, methyl-1-tallowamidoethyl-2-tallowimidazolinium methylsulfate, diethanol ester dimethylammonium chloride, and mixtures thereof; wherein Component I(c) is present at a level of from about 20% to about 60% by weight of Component I; and wherein the weight ratio of said di(hydrogenated tallow)dimethylammonium chloride to said methyl-1-tallowamidoethyl-2-tallowimidazolinium methylsulfate is from about 2:1 to about 6:1.

The above individual components can also be used individually, especially those of I(c) (e.g., ditallowdimethylammonium chloride or diethanol ester dimethylammonium chloride).

Anion A^Θ


In the cationic nitrogenous salts herein, the anion A^Θ provides charge neutrality. Most often, the anion used to provide charge neutrality in these salts is a halide, such as fluoride, chloride, bromide, or iodide. However, other anions can be used, such as methylsulfate, ethylsulfate, hydroxide, acetate, formate, sulfate, carbonate, and the like. Chloride and methylsulfate are preferred herein as anion A^Θ.

II. Polymeric Dye Transfer Inhibiting Agents


The composition of the present invention contains an effective amount of polymeric dye transfer inhibiting agent (dye transfer inhibitor or DTI) or mixtures thereof. An effective amount is typically an amount of DTI which will provide at least about 0.1 ppm, preferably from about 0.1 ppm to about 2,000 ppm, more preferably from about 0.2 ppm to about 1,000 ppm, in the wash or rinse solution. Preferably, the present invention contains from about 0.03% to about 25% of dye transfer inhibitor, more preferably from about 0.1% to about 15%, and even more preferably from about 0.2% to about 10% for concentrated liquid softener compositions, and from about 0.01% to about 8% for compositions with softener active of less than about 9%.

- 20 -


Polyvinylloxazolidone:

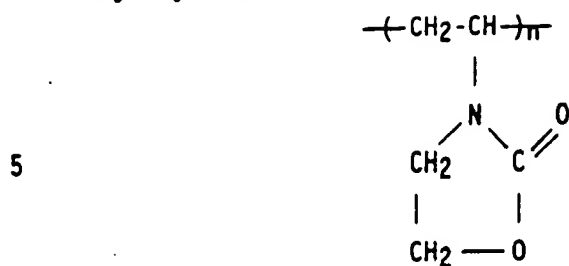

Polyvinylmethyloxazolidone:

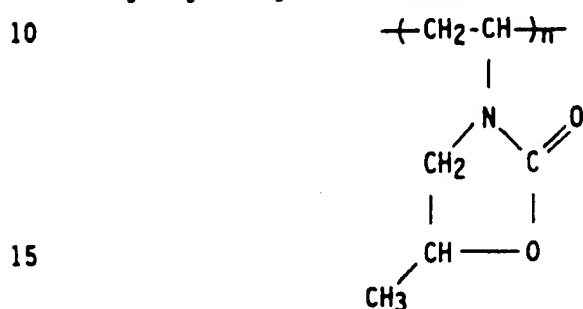


Polyacrylamide and N-substituted polyacrylamides:

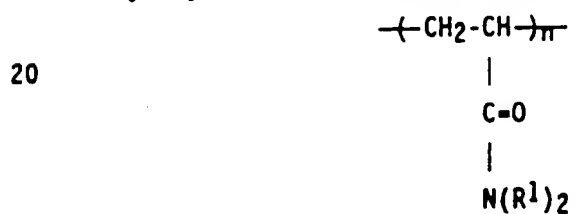

25 wherein each R^1 is independently selected from H and C_1 - C_6 alkyl groups, e.g., methyl, ethyl, propyl, or isopropyl, or two R^1 groups can form a 5 or 6 member ring structure.

Polymethacrylamide and N-substituted polymethacrylamides:

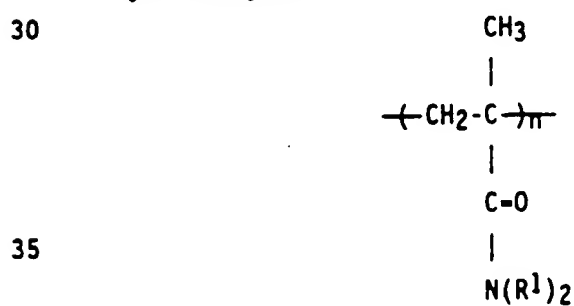

wherein each R^1 is as described above.

- 19 -

wherein each R is H, C₁₋₁₂ (preferably C₁₋₄) alkyl(ene), C₆₋₁₂ aryl(ene) and/or D, m is from 0 to 2, and p is from 1 to about 6; wherein each D contains moieties selected from the group consisting of: L moieties; structural moieties selected from the group consisting of linear and cyclic C₁₋₁₂ (preferably C₁₋₄) alkyl; C₁₋₁₂ alkylene; C₁₋₁₂ heterocyclic groups, which can also contain the DTI active groups; aromatic C₆₋₁₂ groups; and Rs to complete the group, wherein any linking groups which are attached to each other form linkages that are substantially stable under conditions of use; and wherein the nitrogen atoms can be attached to one, two, or three other atoms, the

0


.

number of =N-C- and/or =N → O groups present being sufficient to provide dye transfer inhibition, the total molecular weight being from about 500 to about 1,000,000, preferably from about 1,000 to about 500,000, n being selected to provide the indicated molecular weight, and the water solubility being at least about 100 ppm, preferably at least about 300 ppm, and more preferably at least about 1,000 ppm in water at ambient temperature of about 25°C.

A. Polymers with Active =N-C(=O)- Groups

One useful group of polymeric DTIs include water-soluble polymers containing active =N-C(=O)- groups, excluding enzymes. The nitrogen of the =N-C(=O)- group can be bonded to either one or two other atoms.

Examples of polymers containing =N-C(=O)- groups are:
Polyvinylpyrrolidone:

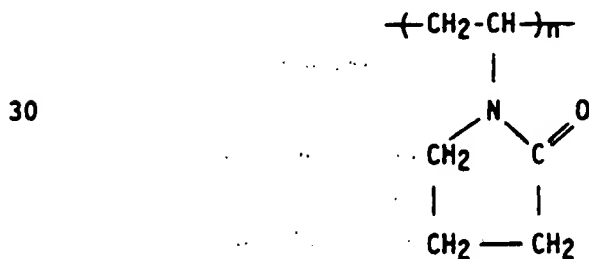

- 22 -

having the nitrogen atoms highly substituted so that they are shielded to different degrees by the surrounding apolar groups. Examples of said polymers are polyvinylpyrrolidones, polyvinyl-oxazolidones, N,N-disubstituted polyacrylamides, and N,N-disubstituted polymethacrylamides. Detailed description of physico-chemical properties of some of these polymers are given in "Water-Soluble Synthetic Polymers: Properties and Behavior," Vol. I, Philip Molyneux, CRC Press, 1983.

These polymers are also useful in the present invention in partially hydrolyzed and/or crosslinked forms.

A preferred dye transfer inhibitor is polyvinylpyrrolidone (PVP). This polymer has an amphiphilic character with a highly polar amide group conferring hydrophilic and polar-attracting properties, and also has apolar methylene and methine groups, in the backbone and/or the ring, conferring hydrophobic properties. The rings may also provide planar alignment with the aromatic rings in the dye molecules. PVP is readily soluble in aqueous and organic solvent systems.

PVP is available from ISP, Wayne, New Jersey, and BASF Corp., Parsippany, New Jersey, as a powder or aqueous solutions in several viscosity grades, designated as, e.g., K-12, K-15, K-25, and K-30. These K-values indicate the viscosity average molecular weight, as shown below:

	<u>K-12</u>	<u>K-15</u>	<u>K-25</u>	<u>K-30</u>
PVP Viscosity Avg. Mol. Wt.	2,500	10,000	24,000	40,000

PVP K-12, K-15, and K-30 are also available from Polysciences, Inc. Warrington, Pennsylvania, and PVP K-15, K-25, and K-30 and poly(2-ethyl-2-oxazoline) are available from Aldrich Chemical Co., Inc., Milwaukee, Wisconsin.


The average molecular weight for water-soluble polymers with -N-C(=O)- groups useful in the present invention is from about 500 to about 100,000, preferably from about 500 to about 40,000, and more preferably from about 1,000 to about 30,000.

35 B. Polymers with Active N-Oxide Groups


Another useful group of polymeric DTI include water-soluble polymers containing active $\text{=N} \rightarrow \text{O}$ groups. The nitrogen of the

- 21 -


Poly(N-acrylyl)glycinamide):

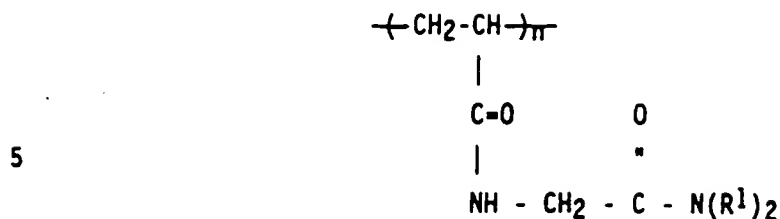


Poly(N-methacrylyl)glycinamide):

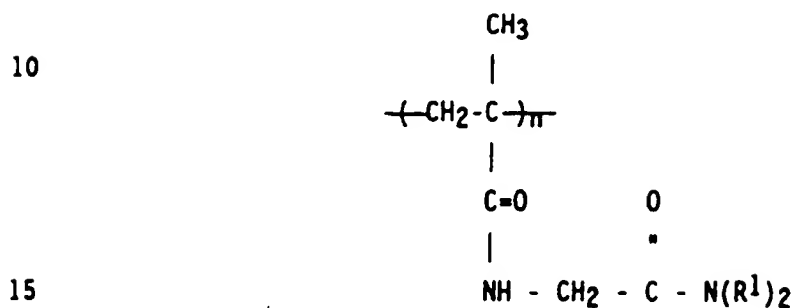

Poly(2-ethyl-2-oxazoline):

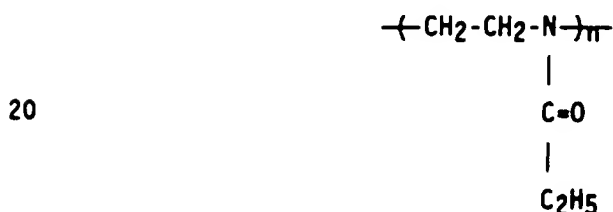

Polyvinylurethane:

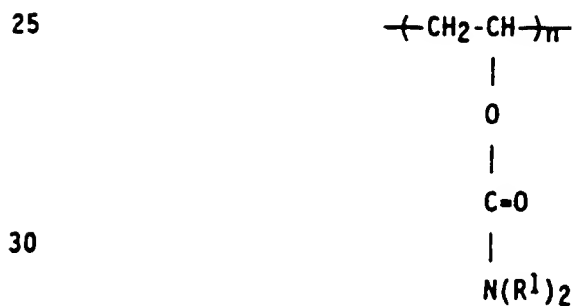

wherein each R^1 is as described above. Mixtures of these groups can be present in the polymeric DTI groups of (A) and (C) described hereinbefore and hereinafter.

These polymers have an amphiphilic character with polar groups conferring hydrophilic properties and apolar groups conferring hydrophobic properties. Preferred polymers are those

- 24 -

Any polymer backbone above can be used in (A) or (B) as long as the polymer formed is water soluble and has dye transfer inhibiting properties. Examples of suitable polymeric backbones are polyvinyls, polyalkylenes, polyesters, polyethers, polyamide, polyimides, polyacrylates, and copolymers and block copolymers thereof, and mixtures thereof.

C. Copolymers Including Active -N-C(=O)- and/or
=N → O Groups

Effective polymeric DTI agents can include those formed by copolymerizing mixtures of monomeric, oligomeric, and/or polymeric units containing active -N-C(=O)- and/or active =N → O groups (e.g., copolymers and/or block copolymers of PVP and PVNO). Other suitable DTI copolymers include those in which an effective amount of monomeric, oligomeric, and/or polymeric units containing active -N-C(=O)- groups and/or active =N → O groups is copolymerized with "filler" monomeric, oligomeric, and/or polymeric units which do not contain active -N-C(=O)- or =N → O groups but which impart other desirable properties to the DTI copolymer, such as increased water solubility or enhanced fabric substantivity [e.g., block copolymer of PVP (≥ about 60%) and polyvinylimidazole].

III. Liquid Carriers

The liquid carrier is typically selected from the group consisting of water, C₁-C₄ monohydric alcohols, C₂-C₆ polyhydric alcohols (e.g., alkylene glycols like propylene glycol), liquid polyalkylene glycols such as polyethylene glycol with an average molecular weight of about 200, and mixtures thereof. Water, a preferred carrier, may be distilled, deionized, or tap water.

IV. Optional Ingredients

A. Polymeric Soil Release Agents

Soil release agents, usually polymers, are especially desirable additives at levels of from about 0.05% to about 5%, preferably from about 0.1% to about 4%, more preferably from about 0.2% to about 3%. Suitable soil release agents are disclosed in U.S. Pat. Nos.: 4,702,857, Gosselink, issued Oct. 27, 1987; 4,711,730, Gosselink and Diehl, issued Dec. 8, 1987; 4,713,194, Gosselink issued Dec. 15, 1987; 4,877,896, Maldonado, Trinh, and Gosselink,

- 23 -

$\equiv\text{N} \rightarrow \text{O}$ group can be bonded to either one, two, or three other atoms.

One or more of the $\equiv\text{N} \rightarrow \text{O}$ groups can be part of the pendant D group or one or more $\equiv\text{N} \rightarrow \text{O}$ groups can be part of the
5 polymerizable P unit or a combination of both.

Where the $\equiv\text{N} \rightarrow \text{O}$ group is part of the pendant D group, preferred D groups contain cyclic structures with the nitrogen atom of the $\equiv\text{N} \rightarrow \text{O}$ group being part of the ring or outside the ring. The ring in the D group may be saturated, unsaturated, or aromatic.
10

Examples of D groups containing the nitrogen atom of the $\equiv\text{N} \rightarrow \text{O}$ group include N-oxides of heterocyclic compounds such as the N-oxides of pyridine, pyrrole, imidazole, pyrazole, pyrazine, pyrimidine, pyridazine, piperidine, pyrrolidone, azolidine,
15 morpholine, and derivatives thereof. A preferred dye transfer inhibitor is poly(4-vinylpyridine N-oxide) (PVNO). Examples of D groups with the nitrogen atom of the $\text{N} \rightarrow \text{O}$ group being outside the ring include aniline oxide and N-substituted aniline oxides.

An example of a polymer wherein the $\equiv\text{N} \rightarrow \text{O}$ group is part of the monomeric P backbone group is polyethyleneimine N-oxide.
20

Mixtures of these groups can be present in the polymeric DTIs of (B) and (C).

The amine N-oxide polymers of the present invention typically have a ratio of amine N-oxide to the amine of from about 1:0 to about 1:2. The amount of amine oxide groups present in the
25 polyamine oxide polymer can be varied by appropriate copolymerization or by appropriate degree of N-oxidation. Preferably, the ratio of amine N-oxide to amine is from about 1:0 to about 1:1, most preferred from 1:0 to about 3:1.

30 The amine oxide unit of the polyamine N-oxides has a $\text{PKa} \leq 10$, preferably $\text{PKa} \leq 7$, more preferably $\text{PKa} \leq 6$.

The average molecular weight of (B) useful in the present invention is from about 500 to about 1,000,000; more preferably from about 1,000 to about 500,000; most preferably from about
35 2,000 to about 100,000.

B. Other Optional Ingredients

A preferred optional ingredient is perfume. Such perfume is preferably present at a level of from about 0.01% to about 5%, preferably from about 0.05% to about 3%, more preferably from about 0.1% to about 2%, by weight of the total composition.

Other adjuvants can be added to the compositions herein for their known purposes. Such adjuvants include, but are not limited to, viscosity control agents, emulsifiers, preservatives, antioxidants, bacteriocides, fungicides, brighteners, opacifiers, freeze-thaw control agents, shrinkage control agents, and agents to provide ease of ironing. These adjuvants, if used, are added at their usual levels, generally each at up to about 5% by weight of the composition.

Viscosity control agents can be organic or inorganic in nature. Examples of organic viscosity modifiers (lowering) are aryl carboxylates and sulfonates (e.g., benzoate, 2-hydroxybenzoate, 2-aminobenzoate, benzenesulfonate, 2-hydroxybenzenesulfonate, 2-aminobenzenesulfonate, etc.), fatty acids and esters, fatty alcohols, and water-miscible solvents such as short chain alcohols. Examples of inorganic viscosity control agents are water-soluble ionizable salts. A wide variety of ionizable salts can be used. Examples of suitable salts are the halides of the group IA and IIA metals of the Periodic Table of the Elements, e.g., calcium chloride, magnesium chloride, sodium chloride, potassium bromide, and lithium chloride. Calcium chloride is preferred. The ionizable salts are particularly useful during the process of mixing the ingredients to make the compositions herein, and later to obtain the desired viscosity. The amount of ionizable salts used depends on the amount of active ingredients used in the compositions and can be adjusted according to the desire of the formulator. Typical levels of salts used to control the composition viscosity are from 0 to about 10,000 parts per million (ppm), preferably from about 10 to about 6,000 ppm by weight of the composition.


Viscosity modifiers (raising) can be added to increase the ability of the compositions to stably suspend water-insoluble particles, e.g., perfume microcapsules. Such materials include

- 25 -

issued Oct. 31, 1989; 4,956,447, Gosselink, Hardy, and Trinh, issued Sep. 11, 1990; and 4,749,596, Evans, Huntington, Stewart, Wolf, and Zimmerer, issued June 7, 1988, said patents being incorporated herein by reference.

5 Especially desirable optional ingredients are polymeric soil release agents comprising block copolymers of polyalkylene terephthalate and polyoxyethylene terephthalate, and block copolymers of polyalkylene terephthalate and polyethylene glycol. The polyalkylene terephthalate blocks preferably comprise ethylene
10 and/or propylene groups. Many such soil release polymers are nonionic.

A preferred nonionic soil release polymer has the following average structure:

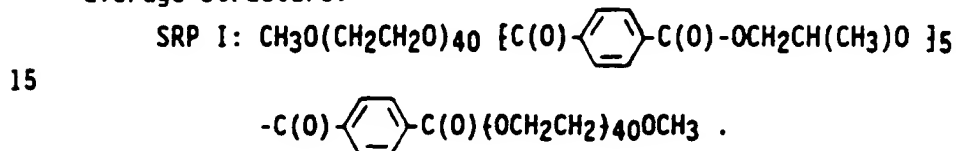

Such soil release polymers are described in U.S. Pat. No. 4,849,257, Borchert, Trinh and Bolich, issued July 18, 1989, said
20 patent being incorporated herein by reference.

Another highly preferred nonionic soil release polymer is described in copending U.S. Pat. Appln. Ser. No. 07/676,682; Pan, Gosselink, and Honsa, filed Mar. 28, 1991, said application being incorporated herein by reference.

25 The polymeric soil release agents useful in the present invention can include anionic and cationic polymeric soil release agents. Suitable anionic polymeric or oligomeric soil release agents are disclosed in U.S. Pat. No. 4,018,569, Trinh, Gosselink and Rattinger, issued April 4, 1989, said patent being incorporated herein by reference. Other suitable polymers are disclosed in U.S. Pat. No. 4,808,086, Evans, Huntington, Stewart, Wolf, and Zimmerer, issued Feb. 24, 1989, said patent being incorporated herein by reference. Suitable cationic soil release
30 polymers are described in U.S. Pat. No. 4,956,447, Gosselink, Hardy, and Trinh, issued Sept. 11, 1990, said patent being incorporated hereinbefore by reference.

(*Equivalent to WO92/17523 published 15.10.92.)

- 28 -

Silicone foam suppressants can also be used. These are usually not emulsified and typically have viscosities of from about 100 cs to about 10,000 cs, preferably from about 200 cs to about 5,000 cs. Very low levels are used, typically from about 0.01% to about 1%, preferably from about 0.02% to about 0.5%. Another preferred foam suppressant is a silicone/silicate mixture, e.g., Dow Corning's Antifoam A®.

Any dye can be used in the compositions of the present invention, but nonionic dyes are preferred to decrease interaction with dye transfer inhibitor. Useful acid dyes include: Polar Brilliant Blue, and D&C Yellow #10, both supplied by Hilton Davis, Cincinnati, Ohio. Nonionic Liquitint® dyes supplied by Milliken, Spartanburg, South Carolina, are also useful. Especially preferred Liquitint dyes are selected from the group consisting of: Blue HP, Blue 65, Experimental Yellow 8949-43, Green HMC, Patent Blue, Royal Blue, Teal, Violet, Yellow II, and mixtures thereof.

A preferred composition contains from 0% to about 3% of polydimethylsiloxane, from 0% to about 0.4% of CaCl_2 , and from about 10 ppm to about 100 ppm of dye.

The pH (10% solution) of the compositions of this invention is generally adjusted to be in the range of from about 2 to about 7, preferably from about 2.4 to about 6.5, more preferably from about 2.6 to about 4. Adjustment of pH is normally carried out by including a small quantity of free acid in the formulation. Because no strong pH buffers are present, only small amounts of acid are required. Any acidic material can be used; its selection can be made by anyone skilled in the softener arts on the basis of cost, availability, safety, etc. Among the acids that can be used are methyl sulfonic, hydrochloric, sulfuric, phosphoric, citric, maleic, and succinic. For the purposes of this invention, pH is measured by a glass electrode in a 10% solution in water of the softening composition in comparison with a standard calomel reference electrode.

V. Process of Making Liquid Compositions

The liquid fabric softening compositions of the present invention can be prepared by the following methods. A convenient and satisfactory method is to prepare a softening active melt

- 27 -

hydroxypropyl substituted guar gum (e.g., Jaguar® HP200, available from Rhône-Poulenc), polyethylene glycol (e.g., Carbowax 20M from Union Carbide), hydrophobic modified hydroxyethylcellulose (e.g., Natrosol Plus® from Aqualon), and/or organophilic clays (e.g., Hectorite and/or Bentonite clays such as Bentones® 27, 34 and 38 from Rheox Co.). These viscosity raisers (thickeners) are typically used at levels from about 500 ppm to about 30,000 ppm, preferably from about 1,000 ppm to about 5,000 ppm, more preferably from about 1,500 ppm to about 3,500 ppm.

10 Examples of bacteriocides useful in the compositions of this invention are glutaraldehyde, formaldehyde, 2-bromo-2-nitropropane-1,3-diol sold by Inolex Chemicals under the trade name Bronopol®, and a mixture of 5-chloro-2-methyl-4-isothiazoline-3-one and 2-methyl-4-isothiazoline-3-one sold by Rohm and Haas Company under the trade name Kathon® CG/ICP. Typical levels of
15 bacteriocides used in the present compositions are from about 1 to about 1,000 ppm by weight of the composition.

 Examples of antioxidants that can be added to the compositions of this invention are propyl gallate, available from
20 Eastman Chemical Products, Inc., under the trade names Tenox® PG and Tenox S-1, and dibutylated hydroxy toluene, available from UOP Process Division under the trade name Sustane® BHT.

 The present compositions can contain silicones to provide additional benefits such as ease of ironing and improved fabric absorbency. The preferred silicones are polydimethylsiloxanes of
25 viscosity of from about 100 centistokes (cs) to about 100,000 cs, preferably from about 200 cs to about 60,000 cs and/or silicone gums. These silicones can be used in emulsified form, which can be conveniently obtained directly from the suppliers. Examples of
30 these preemulsified silicones are 60% emulsion of polydimethylsiloxane (350 cs) sold by Dow Corning Corporation under the trade name DOW CORNING® 1157 Fluid and 50% emulsion of polydimethylsiloxane (10,000 cs) sold by General Electric Company under the trade name General Electric® SM 2140 Silicones. Microemulsions
35 are preferred, especially when the composition contains a dye. The optional silicone component can be used in an amount of from about 0.1% to about 6% by weight of the composition.

- 30 -

In general, the present invention in its fabric softening method aspect comprises the steps of (1) washing fabrics in a conventional washing machine or hand washing with a detergent composition; and (2) rinsing the fabrics in a bath which contains the above described amounts of the fabric softeners; (3) drying the fabrics in an automatic laundry dryer or line drying; and (4) subsequent washing of fabrics in a conventional washing machine or hand washing with a detergent composition. When multiple rinses are used, the fabric softening composition is preferably added to the final rinse.

DRYER-ADDED FABRIC SOFTENING COMPOSITIONS

The present invention also relates to dryer-added fabric conditioning (softening) compositions and articles of manufacture in which the fabric conditioning (softening) compositions are affixed to a dispensing means, e.g., a substrate.

In preferred embodiments, the present invention encompasses articles of manufacture, adapted for use to provide unique dye transfer inhibition benefits and to soften fabrics in an automatic laundry dryer, of the types disclosed in U.S. Pat. Nos: 3,989,631 Marsan, issued Nov. 2, 1976; 4,055,248, Marsan, issued Oct. 25, 1977; 4,073,996, Bedenk et al., issued Feb. 14, 1978; 4,022,938, Zaki et al., issued May 10, 1977; 4,764,289, Trinh, issued Aug. 16, 1988; 4,808,086, Evans et al., issued Feb. 28, 1989; 4,103,047, Zaki et al., issued July 25, 1978; 3,736,668, Dillarstone, issued June 5, 1973; 3,701,202, Compa et al., issued Oct. 31, 1972; 3,634,947, Furgal, issued Jan. 18, 1972; 3,633,538, Hoeflin, issued Jan. 11, 1972; and 3,435,537, Rumsey, issued Apr. 1, 1969; and 4,000,340, Murphy et al., issued Dec. 28, 1976, all of said patents being incorporated herein by reference.

Typical articles of manufacture of this type include articles comprising:

I. a fabric conditioning composition comprising:

- I. an effective amount, preferably from about 50% to about 99%, more preferably from about 70% to about 99%, of fabric softening agent;
- II. an effective amount, preferably from about 0.2% to about 50%, more preferably from about 1% to about 30%, of

- 29 -

premix (active premix) at from about 100°F (about 38°C) to about 190°F (about 88°C), which is then added with high shear mixing with milling to the hot water seat at from about 100°F (about 38°C) to about 190°F (about 88°C). The dye transfer inhibitor can be added to the water seat, prior to the beginning of the premix transfer, either as a powder or as an aqueous solution. Temperature-sensitive optional components can be added after the fabric softening composition is cooled to a lower temperature. Preferably the liquid softener compositions of the present invention are made by a process comprising the following steps:

- (a) Melting and mixing softener active;
- (b) Adding the dye transfer inhibitor to the water seat, the water seat having a temperature from about 100°F (about 38°C) to about 190°F (about 88°C);
- (c) Adding the mixture of (a) into the water seat with agitation;
- (d) Optionally adding a viscosity control agent (e.g., CaCl_2); and
- (e) Cooling the composition.

The dye transfer inhibitor can also be added upon cooling of the composition, during or after Step (e), or into the water seat after premix addition is complete, i.e., after Step (c) but before Step (d).

Surprisingly, adding the dye transfer inhibitor into the water seat prior to premix addition results in products having a better dye transfer inhibition than products with dye transfer inhibitor added after premix addition and cooling.

The liquid fabric softening compositions of this invention are used by adding to the rinse cycle of conventional home laundry operations. Generally, rinse water has a temperature of from about 5°C to about 50°C, more frequently from about 10°C to about 40°C. The concentration of the fabric softener actives of this invention is generally from about 10 ppm to about 200 ppm, preferably from about 25 ppm to about 100 ppm, by weight of the aqueous rinsing bath. The concentration of the dye transfer inhibitor is generally from about 0.3 ppm to about 500 ppm, more preferably from about 1 ppm to about 300 ppm in the rinse solution.

- 32 -

carboxylic acid salts of tertiary alkylamines disclosed in said Kardouche patent. Examples include stearyldimethylammonium stearate, distearylmethylammonium myristate, stearyldimethylammonium palmitate, distearylmethylammonium palmitate, and distearylmethylammonium laurate. These carboxylic salts can be made in situ by mixing the corresponding amine and carboxylic acid in the molten fabric conditioning composition.

Other preferred types of fabric softener are described in detail in U.S. Pat. No. 4,661,269, Toan Trinh, Errol H. Wahl, Donald M. Swartley, and Ronald L. Hemingway, issued April 28, 1987, said patent being incorporated hereinbefore by reference.

Examples of nonionic fabric softeners are the sorbitan esters, C₁₂-C₂₆ fatty alcohols, and fatty amines described herein.

A preferred fabric softening agent for use in substrate articles comprises a mixture of (1) C₁₀-C₂₆ acyl sorbitan esters and mixtures thereof, (2) quaternary ammonium salt, and (3) tertiary alkylamine. The quaternary ammonium salt is preferably present at a level of from about 5% to about 25%, more preferably from about 7% to about 20% of the fabric conditioning composition. The sorbitan ester is preferably present at a level of from about 10% to about 50%, more preferably from about 20% to about 40%, by weight of the fabric conditioning composition. The tertiary alkylamine is present at a level of from about 5% to about 25%, more preferably from 7% to about 20% by weight of the fabric conditioning composition. The preferred sorbitan ester comprises a member selected from the group consisting of C₁₀-C₂₆ acyl sorbitan monoesters and C₁₀-C₂₆ acyl sorbitan di-esters, and ethoxylates of said esters wherein one or more of the unesterified hydroxyl groups in said esters contain from 1 to about 6 oxyethylene units, and mixtures thereof. The quaternary ammonium salt is preferably in the methylsulfate form. The preferred tertiary alkylamine is selected from the group consisting of alkyl dimethylamine and dialkylmethylamine and mixtures thereof, wherein the alkyl groups can be the same or different and contain from about 14 to about 22 carbon atoms.

Yet another preferred fabric softening agent comprises a carboxylic acid salt of a tertiary alkylamine, in combination with a

- 31 -

polymeric dye transfer inhibiting agent; and

III. optionally, a dispensing means which provides for release of an effective amount of said composition to fabrics in an automatic laundry dryer at automatic laundry dryer operating temperatures, e.g., from about 35°C to 115°C.

When the dispensing means is a flexible substrate, e.g., in sheet configuration, the fabric conditioning composition is releasably affixed on the substrate to provide a weight ratio of conditioning composition to dry substrate ranging from about 10:1 to about 0.5:1, preferably from about 5:1 to about 1:1.

The term "fabric softening agent" as used herein includes cationic and nonionic fabric softeners used alone and also in combination with each other. A preferred fabric softening agent of the present invention is a mixture of cationic and nonionic fabric softeners. An effective amount of dye transfer inhibitor is an amount which will provide from about 0.1 ppm to about 500 ppm of DTI in the wash solution.

I. Fabric Softening Agents

Examples of fabric softening agents that are especially useful in the substrate articles are the compositions described in U.S. Pat. Nos.: 4,103,047, Zaki et al., issued July 25, 1978; 4,237,155, Kardouche, issued Dec. 2, 1980; 3,686,025, Morton, issued Aug. 22, 1972; 3,849,435, Diery et al., issued Nov. 19, 1974; and U.S. Pat. No. 4,073,996, Bedenk et al., issued Feb. 14, 1978; said patents are hereby incorporated herein by reference. Other fabric softening agents are disclosed hereinafter with respect to detergent-compatible fabric conditioning compositions.

Particularly preferred cationic fabric softeners for substrate articles include quaternary ammonium salts such as dialkyl dimethylammonium chlorides, methylsulfates, and ethylsulfates wherein the alkyl groups can be the same or different and contain from about 14 to about 22 carbon atoms. Examples of such preferred materials include ditallowalkyldimethylammonium methylsulfate (DTDMA), distearyldimethylammonium methylsulfate, dipalmytyldimethylammonium methylsulfate and dibehenyldimethylammonium methylsulfate. Also particularly preferred are the

II. Polymeric Dye Transfer Inhibiting Agents

Dye transfer inhibiting agents useful for dryer-added fabric softening compositions and articles of the present invention are those described earlier for rinse-added fabric softening compositions. Preferred are solid materials having particle size of about 1 mm or smaller, more preferably about 0.5 mm or smaller, most preferably about 0.2 mm or smaller. Commercial solid polyvinylpyrrolidones are normally available with particle size of less than about 1 mm.

When the dye transfer inhibiting agent has a larger particle size, the particle size can be conveniently reduced by grinding techniques followed by an appropriate particle size sorting method, e.g., sieving.

It is desirable, for ease of application, to intimately admix the ingredients of the fabric softening composition before application to a substrate dispensing means.

III. Optional Dispensing Means

In the preferred substrate article embodiment, the fabric conditioning compositions are provided as an article of manufacture in combination with a dispensing means such as a flexible substrate which effectively releases the composition in an automatic laundry (clothes) dryer. Such dispensing means can be designed for single usage or for multiple uses. The dispensing means can also be a "vanishing substrate material" that releases the fabric conditioning composition and then is dispersed and/or exhausted from the dryer.

The dispensing means will normally carry an effective amount of fabric conditioning composition. Such effective amount typically provides sufficient fabric softening agent and dye transfer inhibitor for at least one treatment of a minimum load in an automatic laundry dryer. Amounts of fabric conditioning composition for multiple uses, e.g., up to about 30, can be used. Typical amounts for a single article can vary from about 0.25 g to about 100 g, preferably from about 0.5 g to about 10 g, most preferably from about 1 g to about 5 g.

A highly preferred article herein comprises the fabric conditioning composition releasably affixed to a flexible sub-

- 33 -

fatty alcohol and a quaternary ammonium salt. The carboxylic acid salt of a tertiary amine is used in the fabric conditioning composition preferably at a level of from about 5% to about 50%, and more preferably, from about 15% to about 35%, by weight of the fabric treatment composition. The quaternary ammonium salt is used preferably at a level of from about 5% to about 25%, and more preferably, from about 7% to about 20%, by weight of the fabric treatment composition. The fatty alcohol can be used preferably at a level of from about 10% to about 25%, and more preferably from about 10% to about 20%, by weight of the fabric treatment composition. The preferred quaternary ammonium salt is selected from the group consisting of dialkyl dimethylammonium salt wherein the alkyl groups can be the same or different and contain from about 14 to about 22 carbon atoms and wherein the counteranion is selected from the group consisting of chloride, methylsulfate and ethylsulfate, preferably methylsulfate. The preferred carboxylic acid salt of a tertiary alkylamine is selected from the group consisting of fatty acid salts of alkyldimethylamines wherein the alkyl group contains from about 14 to about 22 carbon atoms, and the fatty acid contains from about 14 to about 22 carbon atoms, and mixtures thereof. The preferred fatty alcohol contains from about 14 to about 22 carbon atoms.

More biodegradable fabric softener compounds can be desirable. Biodegradability can be increased, e.g., by incorporating easily destroyed linkages into hydrophobic groups. Such linkages include ester linkages, amide linkages, and linkages containing unsaturation and/or hydroxy groups. Examples of such fabric softeners can be found in U.S. Pat. Nos.: 3,408,361, Mannheimer, issued Oct. 29, 1968; 4,709,045, Kubo et al., issued Nov. 24, 1987; 4,233,451, Pracht et al., issued Nov. 11, 1980; 4,127,489, Pracht et al., issued Nov. 28, 1979; 3,689,424, Berg et al., issued Sept. 5, 1972; 4,128,485, Baumann et al., issued Dec. 5, 1978; 4,161,604, Elster et al., issued July 17, 1979; 4,189,593, Wechsler et al., issued Feb. 19, 1980; and 4,339,391, Hoffman et al., issued July 13, 1982, said patents being incorporated herein by reference.

- 36 -

composition. This article is simply added to a clothes dryer together with the damp fabrics to be treated. The dryer is then operated in standard fashion to dry the fabrics, usually at a temperature of from about 50°C to about 80°C for a period from about 10 minutes to about 60 minutes, depending on the fabric load and type. On removal from the dryer, the dried fabrics have acquired treatment with dye transfer inhibitor and are softened. It is believed that the dye transfer inhibitor deposited on the fabric is resolubilized in the subsequent wash solution to provide a noticeable dye transfer inhibition effect.

IV. Optional Ingredients

A. Viscosity Control Agents

Very useful ingredients are viscosity control agents, especially particulate clays, which are especially useful in the substrate articles. Examples of the particulate clays useful in the present invention are described in U.S. Pat. No. 4,103,047, supra, which is incorporated herein by reference. A preferred clay viscosity control agent is calcium bentonite clay, available from Southern Clay Products under the trade name Bentolite® L. The clay viscosity control agent is preferably present at a level of from about 0.5% to about 15%, more preferably from about 1.5% to about 10% by weight of the fabric conditioning composition.

B. Other Optional Ingredients

Well known optional components included in the fabric conditioning composition which are useful in the present invention are narrated in U.S. Pat. No. 4,103,047, supra, incorporated hereinbefore by reference.

A preferred optional ingredient is perfume/cyclodextrin inclusion complex present in the fabric conditioning composition at from about 0.5% to about 50%, preferably from about 1% to about 45%, more preferably from about 5% to about 40%. See U.S. Pat. No. 5,094,761, Trinh, Gardlik, Banks, and Benvegna, issued Mar. 10, 1992; and U.S. Pat. No. 5,102,564, Gardlik, Trinh, Banks, and Benvegna, issued Apr. 7, 1992, which are incorporated herein by reference.

Another preferred optional ingredient is free perfume, other than the perfume which is present as the perfume/cyclodextrin

- 35 -

strate in a sheet configuration. Highly preferred paper, woven or nonwoven "absorbent" substrates useful herein are fully disclosed in U.S. Pat. No. 3,686,025, Morton, issued Aug. 22, 1972, incorporated herein by reference.

5 Nonwoven cloth substrates preferably comprise cellulosic fibers having a length of from about 3/16 inch to about 2 inches and a denier of from about 1.5 to about 5 and the substrates are adhesively bonded together with binder resin.

10 The flexible substrate preferably has openings sufficient in size and number to reduce restriction by said article of the flow of air through an automatic laundry dryer. The better openings comprise a plurality of rectilinear slits extended along one dimension of the substrate.

15 The substrate embodiment of this invention can be used for imparting the above-described fabric conditioning composition to fabric to provide dye transfer inhibition and/or softening and/or antistatic effects to fabric in an automatic laundry dryer in a process comprising: commingling pieces of damp fabric by tumbling said fabric under heat in an automatic clothes dryer with an
20 effective amount of the fabric conditioning composition, at least the continuous phase of said composition having a melting point greater than about 35°C and said composition being mobilized, e.g., flowable, at dryer operating temperature, said composition comprising from about 0.2% to about 50%, preferably from about 1%
25 to about 30% of a dye transfer inhibitor powder, and from about 50% to about 99%, preferably from about 70% to about 99%, of fabric softening agent selected from the above-defined cationic and nonionic fabric softeners and mixtures thereof.

The method herein is carried out in the following manner.
30 Damp fabrics, usually containing from about 1 to about 3.5 times their weight of water, are placed in the drum of an automatic laundry (clothes) dryer. In practice, such damp fabrics are commonly obtained by laundering, rinsing, and spin-drying the fabrics in a standard washing machine. In a preferred mode, the
35 present process is carried out by fashioning an article comprising the substrate-like dispensing means of the type hereinabove described in releasable combination with a fabric conditioning

- 38 -

fabric softening agent; and

- II. an effective amount, preferably from about 0.1% to about 80%, more preferably from about 0.3% to about 50%, and even more preferably from about 0.5% to about 25%, of dye transfer inhibiting agent.

5

An effective amount of DTI is an amount which will provide from about 0.1 ppm to about 500 ppm of DTI in the rinse solution.

Optional, but preferred, ingredients include dispersing agents and perfumes. Preferred dispersing agents are cationic surfactants such as C₁₂-C₁₈ alkyl trimethylammonium halide, choline ester of fatty acids, etc. Such dispersing agents are present at a level of from 0 to about 45%, preferably from about 1% to about 30%.

10

Particulate fabric softener compositions for addition in the wash or rinse cycles of an automatic laundering operation have been described in, e.g., U.S. Pat. Nos.: 3,256,180, Weiss, issued June 14, 1966; 3,351,483, Miner et al., issued Nov. 7, 1967; 4,308,151, Cambre, issued Dec. 29, 1981; 4,589,989, Muller et al., issued May 20, 1986; and 5,009,800, Foster, issued April 23, 1991; and foreign patent applications: Jap. Laid Open Appln. No. 8799/84, laid open Jan. 18, 1984; Jap. Appln. No. J62253698-A, Nov. 5, 1987; Jap. Laid Open Appln. No. 1-213476, laid open Aug. 28, 1989; Can. Appln. No. CA1232819-A, Feb. 16, 1988; Jap. Appln. No. J63138000-A, June 9, 1988; and European Appln. No. EP-289313-A, Nov. 2, 1988, all of said patents being incorporated herein by reference. A granular fabric softener composition which can be used to prepare a liquid composition is disclosed in allowed U.S. Pat. Application Ser. No. 07/689,406,* Hartman, Brown, Rusche, and Taylor, filed April 22, 1991, said application being incorporated herein by reference.

15

20

25

30

COMPOSITIONAL ADVANTAGES OF THE PRESENT INVENTION

Preferably the softener compositions of the present invention are substantially, preferably, essentially free of aerosol propellants; bleach (especially activated bleach); sachets containing active ingredient; and anionic surfactants. The liquid softener (*Equivalent to W092/18593 published 29.10.92.)

35

- 37 -

inclusion complex, which is also very useful for imparting odor benefits, especially in the product and/or in the dryer. Preferably, such free perfume contains at least about 1%, more preferably at least about 10% by weight of said free perfume, of substantive perfume materials. Such free perfume is preferably present at a level of from about 0.10% to about 10% by weight of the portion of the composition that is transferred to the fabrics, e.g., everything but the dispensing means in substrate articles.

Other preferred optional ingredients are polymeric soil release agents, described in Section IV.A above of liquid compositions. Preferably, these polymeric soil release agents contain one, or more, negatively charged functional groups such as the sulfonate functional group, preferably as capping groups at the terminal ends of said polymeric soil release agent. The soil release agent is preferably present at a level of from about 1% to about 50%, more preferably from about 5% to about 45%, and most preferably from about 10% to about 40%, by weight of the fabric conditioning composition.

The polymeric soil release agents preferably become molten at temperatures no higher than about 90°C and have viscosities of less than about 10,000 cps at 85°C. Other polymeric soil release agents with higher viscosities can be used when they are mixed with a viscosity reducing agent. Examples of some viscosity reducing agents for polymeric soil release agents, useful for the present invention, are given in U.S. Pat. Nos.: 4,863,619, issued Sept. 5, 1989; 4,925,577, issued May 15, 1990; 5,041,230, issued Aug. 20, 1991, to Borchert, Delgado, and Trinh; these patents are incorporated herein by reference.

The articles of manufacture disclosed hereinbefore can impart noticeable dye transfer inhibition benefits plus softening and/or antistatic effects to fabrics when used in an automatic laundry dryer.

SOLID, PARTICULATE FABRIC SOFTENER COMPOSITIONS

Solid, particulate fabric softening compositions of the present invention typically comprise:

- I. an effective amount, preferably from about 20% to about 90%, more preferably from about 30% to about 70%, of

- 40 -

articles and methods. The examples presented hereinbefore and hereinafter do not limit the present invention.

Examples of Liquid Fabric Softening Compositions

The following liquid softener compositions, when added to the
5 rinse cycle of an automatic laundry operation, show dye transfer inhibition in the subsequent wash cycle.

<u>Examples:</u>		<u>1-3</u>	<u>4</u>
	<u>Components</u>	<u>(Wt.%)</u>	<u>(Wt.%)</u>
	DTDMAC/MTTMAC* Blend (83%)	4.5	4.5
10	1-Tallow(amidoethyl)-2-Tallowimidazoline	-	3.4
	HCl	-	0.2
	PVP K-15	1.0	0.5
	Perfume	-	0.4
15	Minor Ingredients**	0.5	0.5
	Deionized Water	<u>Balance</u>	<u>Balance</u>
		100.00	100.00

*Ditallowdimethylammonium chloride/monotallowtrimethyl-
20 ammonium chloride.

**Minor ingredients include: Dow Corning polydimethylsiloxane emulsion, calcium chloride, Kathon® CG/ICP bacteriocide, and Liquitint® Blue 65 dye.

EXAMPLE 1

25 The composition of Example 1 is made by the following procedures:

Adding PVP K-15 (average molecular weight of about 10,000, either as a powder or in aqueous solution) with mixing to a vessel containing deionized water, heated to about 65°C. Molten
30 DTDMAC/MTTMAC blend (at about 80°C) is added with high shear mixing to the aqueous solution. After softener incorporation, the mixture is cooled, and the minor ingredients are added during the cooling process.

EXAMPLE 2

35 The composition of Example 2 is made similarly to the procedure of Example 1, except that the PVP is added after about 85%

- 39 -

compositions are, in addition, essentially free of large amounts (more than two times the amount of polymeric DTI) of highly ethoxylated and/or propoxylated materials (more than about eight ethoxylated and/or propoxylated units) when the fabric softening agent is methyl-1-oleylamidoethyl-2-oleylimidazolinium metho-
5 sulfate, or analogous agent. The dryer-added compositions are also essentially free of polymer-coated soil release polymers. -----

The present invention, especially in the fabric softener aspect, can provide improved DTI benefits after multiple laundry
10 operations. In addition, the invention can improve the appearance of fabrics that have previously been stained by dye transfer. Even after dyes deposit and discolor fabric, the polymeric DTI will help remove this dye from fabrics, especially, e.g., in fabric softener compositions, when used in multiple cycles. Also,
15 the invention can provide a soil anti-redeposition benefit in the wash cycle.

The present invention also relates to a laundry method of minimizing dye transfer during the wash cycle of a laundering process by providing an effective amount of dye transfer inhibitor
20 into the wash solution by means other than by adding it as part of a detergent composition. For example, DTI can be added to the wash solution as a powder, an aqueous solution, via a dispensing means (e.g., substrate) which will prevent powder inhalation, etc.

The invention also encompasses a laundry process (method) for
25 imparting dye transfer inhibition plus softening and/or antistatic effects to fabrics comprising: washing a load of fabrics in a wash solution containing a detergent composition; rinsing said load of fabrics with a composition comprising an effective amount of softening active and an effective amount of dye transfer inhibitor
30 and/or tumbling the load of fabrics under heat in the dryer with a dryer-added softener composition comprising an effective amount of dye transfer inhibitor; and subsequently washing all or part of said load of fabrics, together with or without additional fabrics, during which the dye transfer inhibitor is effectively released
35 into the wash solution containing a detergent composition. A load of fabrics includes one or more fabric articles.

The following are nonlimiting examples of the instant

- 42 -

EXAMPLE 7

The composition of Example 7 is made similarly to that of Example 4, except that molten soil release polymer is added to the aqueous solution before addition of the PVP. The soil release polymer used is the nonionic soil release polymer SRP I as described in Section IV.A of liquid compositions (supra). The PVP used in Example 7 has an average molecular weight of about 2,500 (PVP K-12).

<u>Examples:</u>		<u>8</u>	<u>9</u>	<u>10</u>
10	<u>Components</u>	(Wt.%)	(Wt.%)	(Wt.%)
	DTDMAC/MTTMAC* Blend (83%)	10.48	10.48	10.48
	1-Tallow(amidoethyl)-2-Tallowimidazoline	14.3	14.3	14.3
	HCl	0.85	0.85	0.85
15	Poly(2-ethyl-2-oxazoline)	3.15	-	-
	Polyacrylamide (12,000 MW)	-	3.15	-
	Polyacrylamide (22,000 MW)	-	-	3.15
	Perfume	1.35	1.35	1.35
	Minor Ingredients**	1.52	1.52	1.52
20	Deionized Water	<u>Balance</u>	<u>Balance</u>	<u>Balance</u>
		100.00	100.00	100.00

*Ditallowdimethylammonium chloride/monotallowtrimethylammonium chloride.

25 **Minor ingredients as given in Example 1.

EXAMPLE 8

The composition of Example 8 is made similarly to that of Example 5, except that the PVP is replaced by poly(2-ethyl-2-oxazoline). This dye transfer inhibitor has an average molecular weight of about 50,000, and is available from Aldrich Chemical Company, Milwaukee, Wisconsin.

EXAMPLES 9-10

35 The composition of Examples 9 and 10 are made similarly to that of Example 5, except that the PVP is replaced by polyacrylamide. The polyacrylamide used in Example 9 has an average molecular weight of about 12,000, while the polyacrylamide used in

- 41 -

of the softener addition is complete. Viscosity is adjusted at this point by adding calcium chloride (0.17%) before PVP addition.

EXAMPLE 3

The composition of Example 3 is made similarly to the procedure of Example 2, except that the PVP is added after all of the softener has been added and the dispersion cooled to room temperature.

<u>Examples:</u>		<u>5</u>	<u>6</u>	<u>7</u>
	<u>Components</u>	(Wt.%)	(Wt.%)	(Wt.%)
10	DTDMAC/MTTMAC* Blend (83%)	10.48	10.48	10.48
	1-Tallow(amidoethyl)-2-Tallowimidazoline	14.3	14.3	14.3
	HCl	0.85	0.85	0.85
	PVP K-15	3.15	-	-
15	PVP K-25	-	3.15	-
	PVP K-12	-	-	3.15
	Soil Release Polymer	-	-	2.25
	Perfume	1.35	1.35	1.35
	Minor Ingredients**	1.52	1.52	1.52
20	Deionized Water	<u>Balance</u>	<u>Balance</u>	<u>Balance</u>
		100.00	100.00	100.00

*Ditallowdimethylammonium chloride/monotallowtrimethylammonium chloride.

25 **Minor ingredients as given in Example 1.

EXAMPLES 4-6

The compositions of Examples 4, 5, and 6 are made by adding PVP with mixing to a vessel containing deionized water and HCl, heated to about 65°C. DTDMAC/MTTMAC blend and 1-tallow(amidoethyl)-2-tallowimidazoline are then added as a molten blend (at about 80°C) with high shear mixing to the aqueous solution. After softener incorporation, the mixture is cooled, and the minor ingredients are added during the cooling process. Perfume is added when the composition is at about 40-50°C. The PVP used in Example 6 has an average molecular weight of about 25,000 (PVP K-25).

- 44 -

- (2) SRP I of Example 7.
 (3) Mono(tallowoxyloxyethyl)hydroxyethyl dimethylammonium chloride.
 (4) Minor ingredients as given in Example 1, and also including Dow Corning Antifoam 2210®.

5

EXAMPLE 12

The composition of Example 12 is made by adding PVP with mixing to a vessel containing deionized water, HCl, antifoam, and soil release polymer at about 79-85°C. DEQA is heated to about 85-90°C to melt and is then added with high shear mixing to the aqueous solution. Viscosity adjuster (e.g., calcium chloride) is added to the mixture, followed by addition of perfume. The mixture is milled and then cooled to about 18-27°C. Remaining minor ingredients are post-added at ambient temperature.

15

EXAMPLE 13

The composition of Example 13 is made similarly to that of Example 12 except that the aqueous solution to which the PVP is added is at about 77°C and the DEQA is preheated to about 71°C.

20

EXAMPLE 14

The composition of Example 14 is made similarly to that of Example 12, except that molten 1-tallow(amidoethyl)-2-tallowimidazoline ester is premixed with the hot DEQA before addition to the aqueous solution.

25

<u>Examples:</u>		<u>15</u>	<u>16</u>
<u>Components</u>		(Wt.%)	(Wt.%)
DTDMAC/MTTMAC* Blend (83%)		10.48	10.48
1-Tallow(amidoethyl)-2-Tallowimidazoline		14.3	14.3
PVNO (50,000 MW)		1.0	-
PVNO (25,000 MW)		-	1.0
HCl		0.85	0.85
Perfume		1.35	1.35
Minor Ingredients**		1.52	1.52
Deionized Water		<u>Balance</u>	<u>Balance</u>
		100.00	100.00

35

- 43 -

Example 10 has an average molecular weight of about 22,000. Both types of polyacrylamide are available from Polysciences, Warrington, Pennsylvania.

5	<u>Components</u>	<u>Example 11</u>
		(Wt.%)
	1-Tallow(amidoethyl)-2-Tallowimidazoline Ester	22.0
	PVP K-15	8.0
	HCl	1.25
10	Perfume	1.35
	Minor Ingredients**	0.4
	Deionized Water	<u>Balance</u>
		100.00

**Minor ingredients as given in Example 1.

15

EXAMPLE 11

The composition of Example 11 is made similarly to that of Example 5, except that the softener active blend is replaced by 1-tallow(amidoethyl)-2-tallowimidazoline ester.

20	<u>Examples:</u>	<u>12</u>	<u>13</u>	<u>14</u>
		(Wt.%)	(Wt.%)	(Wt.%)
	<u>Components</u>			
	Hard-tallow DEQA(1)	7.5	-	9
	Soft-tallow DEQA(1)	-	23.5	-
	HCl (25%)	0.112	0.336	0.97
25	Soil Release Polymer(2)	0.17	0.5	0.5
	Perfume	0.4	1.20	1.3
	Monoester(3)	0.7	2.2	0.7
	Ethanol	1.3	4	1.5
	1-Tallow(amidoethyl)-2-Tallowimidazoline Ester	-	-	14.3
30	PVP K-30	1	3.15	-
	PVP K-15	-	-	3.0
	Minor Ingredients(4)	0.32	0.67	0.6
	Water	<u>Balance</u>	<u>Balance</u>	<u>Balance</u>
35		100.00	100.00	100.00

(1) Di(tallowoyloxyethyl)dimethyl ammonium chloride and di(tallowoyloxyethyl)methylamine.

- 46 -

is placed on a heated metal plate with a spatula and then is spread evenly with a wire metal rod. A nonwoven substrate sheet is placed on the metal plate to absorb the coating mixture. The sheet is then removed from the heated metal plate and allowed to cool to room temperature so that the coating mix can solidify. The sheet is weighed to determine the amount of coating mixture on the sheet. The target coating is 2.0 g per sheet. If the weight is in excess of the target weight, the sheet is placed back on the heated metal plate to remelt the coating mixture and remove some of the excess. If the weight is under the target weight, the sheet is also placed on the heated metal plate and more coating mixture is added.

		<u>Example 18</u>
		(Wt.%)
15	<u>Components</u>	
	Octadecyldimethylamine	11.89
	C ₁₂₋₁₄ Fatty Acid	8.29
	C ₁₆₋₁₈ Fatty Acid	10.69
	DTDMAMS	19.32
	Sorbitan Monostearate	19.32
20	Clay	3.86
	PVP K-15	<u>26.62</u>
	Total	100.00

EXAMPLE 1825 Preparation of the Coating Mix and Fabric Conditioning Sheets

A first blend of about 11.89 parts octadecyldimethylamine (Ethyl Corporation), 8.29 parts C₁₂₋₁₄ fatty acid (The Procter & Gamble Co.), and 10.69 parts C₁₆₋₁₈ fatty acid (Emery Industries, Inc.) are melted together at 80°C, and a second blend of about 19.32 parts sorbitan monostearate (Mazer Chemicals, Inc.) and 19.32 parts ditallowdimethylammonium methylsulfate, DTDAMS, (Sherex Chemical Co.) are melted together to form the softener component of the composition, during which time the mixture is kept molten in a boiling water bath. The calcium bentonite clay (3.86 parts Bentolite L, available from Southern Clay Co.) is then

- 45 -

*Ditallowdimethylammonium chloride/monotallowtrimethyl-
ammonium chloride.

**Minor ingredients as given in Example 1.

EXAMPLES 15 and 16

5 The compositions of Examples 15 and 16 are made similarly to
that of Example 5, except that the PVP is replaced by poly(4-
vinylpyridine N-oxide) (PVNO).

Examples of Fabric Conditioning Substrate Articles

10 The following fabric conditioning compositions and substrate
articles, when added to the tumble dryer with the wet laundry
load, show dye transfer inhibition in the subsequent wash cycle.

Example 17

	<u>Components</u>	<u>(Wt.%)</u>
	DTDMAC	80.00
15	Calcium Bentonite Clay	4.00
	PVP K-15	<u>16.00</u>
	Total	100.00

EXAMPLE 17

Preparation of the Coating Mix

20 An approximately 200 gram batch of the coating mix is pre-
pared as follows. An amount of about 160 g of ditallowdimethyl-
ammonium chloride (DTDMAC) is melted at 80°C. The calcium ben-
tonite clay (about 8 g of Bentolite L, available from Southern
25 Clay Co.) is slowly added to the mixture with high shear mixing.
During the mixing, the mixture is kept molten in a boiling water
bath. About 32 g of PVP K-15 is then slowly added to the mixture
with high shear mixing, and the formula is mixed until the mixture
is smooth and homogenous.

Preparation of Fabric Conditioning Sheets

30 The coating mixture is applied to preweighed nonwoven sub-
strate sheets of about 9 inch x 11 inch (approximately 23 cm x 28
cm) dimensions. The substrate sheets are comprised of 70%
3-denier, 1-9/16 inch (approximately 4 cm) long rayon fibers with
35 30% polyvinyl acetate binder. The substrate weight is about 16 g
per square yard (about 1.22 g/sheet). A small amount of formula

- 48 -

EXAMPLE 20Preparation of Coating Mix and Fabric Conditioning Sheets

A fabric conditioning composition and a dryer-added fabric conditioning article comprising a rayon nonwoven fabric substrate [having a weight of 1.22 g per 99 sq. in. (approximately 639 cm²)] are prepared in the following manner.

A premixture is prepared by admixing about 11.63 parts octadecyldimethylamine with about 20.59 parts C16-18 fatty acid at about 75°C. Then about 20.20 parts sorbitan monostearate and about 20.20 parts ditallowdimethylammonium methylsulfate are added with high shear mixing at about 75°C. After the addition is completed and a sufficient period of mixing time has elapsed, about 5.99 parts of Bentolite L particulate clay is added slowly while maintaining the high shear mixing action. Then about 18.93 parts of PVP powder is added with mixing. Finally about 2.46 parts of perfume is added to complete the preparation of the fabric conditioning composition.

The flexible substrate, comprised of about 70% 3-denier, 1-9/16 inch long (approximately 4 cm) rayon fibers and about 30% polyvinyl acetate binder, is impregnated by coating one side of a continuous length of the substrate and contacting it with a rotating cylindrical member which serves to press the liquified mixture into the interstices of the substrate. The amount of fabric conditioning mixture applied is controlled by the flow rate of the mixture and/or the line speed of the substrate. The substrate is passed over several chilled tension rolls which help solidify the conditioning mixture. The substrate sheet is about 9 inches wide (approximately 23 cm) and is perforated in lines at about 11 inch intervals (approximately 28 cm) to provide detachable sheets. Each sheet is cut with a set of knives to provide three evenly spaced parallel slits averaging about 4 inches in length (approximately 10 cm). In this Example 18, the application rate is adjusted to apply about 2.52 g of coating mixture per sheet. Each sheet contains about 1.83 g of softener, about 0.15 g of clay, about 0.48 g of PVP and about 0.062 g of perfume.

- 47 -

slowly added to the mixture while high shear mixing. An amount of about 26.62 parts of PVP K-15 is then added in small portions, and the formula is mixed until the mixture is smooth and completely homogenous.

- 5 The coating mixture is applied to preweighed nonwoven substrate sheets as in Example 17. The target coating is 2.33 g per sheet. Each sheet contains about 1.62 g of softener, about 0.09 g of clay, and about 0.62 g of PVP.

<u>Examples:</u>		<u>19</u>	<u>20</u>
10	<u>Components</u>	(Wt.%)	(Wt.%)
	Octadecyldimethylamine	10.88	11.63
	C ₁₂₋₁₄ Fatty acid	7.58	-
	C ₁₆₋₁₈ Fatty Acid	9.78	20.59
	DTDMAMS	17.67	20.20
15	Sorbitan Monostearate	17.67	20.20
	Clay	3.54	5.99
	PVP K-15	15.00	18.93
	Perfume/Cyclodextrin Complex	15.44	-
	Free Perfume	<u>2.44</u>	<u>2.46</u>
20	Total	100.00	100.00
	Coating Wt. per Sheet (g)	2.55	2.52

EXAMPLE 19

Preparation of Coating Mix and Fabric Conditioning Sheets

- 25 The softener mixture of Example 19 is prepared similarly to that of Example 18. However, the coating mixture of Example 19 contains both perfume in the free state and perfume complexed with β -cyclodextrin. The free perfume provides the initial perfume odor to the dry fabrics, while the complexed perfume is used to provide the freshness impression to the re-wetted fabrics. The target coating is 2.55 g per sheet. Each sheet contains about 1.62 g of softener, about 0.09 g of clay, 0.38 g of PVP, about 0.40 g of perfume/cyclodextrin complex, and about 0.062 g of free perfume.

35

- 52 -

CLAIMS:

1. A fabric softening composition capable of reducing the transfer of dyes during subsequent wash cycles comprising:

I. an effective amount of fabric softening agent; and

II. an effective amount of water-soluble polymeric dye transfer inhibitor selected from the group consisting of:

(A) polymers, which are not enzymes, with one or more monomeric units containing at least one $=N-C(=O)-$ group having an average molecular weight of from 500 to 100,000;

(B) polymers with one or more monomeric units containing at least one N-oxide group having an average molecular weight of from 500 to 1,000,000;

(C) polymers containing both $=N-C(=O)-$ and N-oxide groups of (A) and (B); and

(D) mixtures thereof;

wherein the composition is essentially free of aerosol propellant; bleach; sachets containing an active ingredient; anionic surfactant; and additionally for liquid compositions, essentially free of large amounts of highly ethoxylated and/or propoxylated material when the fabric softening agent is methyl-1-oleylamidoethyl-2-oleylimidazolinium methosulfate, or analogous agent, and additionally, for dryer-added compositions, essentially free of polymer-coated soil release polymers.

2. A liquid composition according to Claim 1 comprising:

I. from 3% to 50% fabric softening agent; and

II. from 0.03% to 25% of dye transfer inhibitor.

3. A dryer-added composition according to Claim 1 comprising:

I. from 50% to 99%, preferably from 70% to 99%, fabric softening agent;

II. from 0.2% to 50%, preferably from 1% to 30%, of dye transfer inhibitor having a particle size of 0.5 mm or smaller, preferably 0.2 mm or smaller; and

Examples of Solid, Particulate Fabric Softening Compositions

The following solid softener compositions can be reconstituted into liquid compositions. When added to the rinse cycle of an automatic laundering operation, these liquid compositions show dye transfer inhibition in the subsequent wash cycle.

The solid particulate compositions herein effectively disperse following simple addition to lukewarm water with gentle agitation (e.g., manual shaking). Improved results are obtained by using higher temperatures and/or effective mixing conditions, e.g., high shear mixing, milling, etc. However, even the mild conditions provide acceptable aqueous compositions.

ComponentsExample 21

	(Wt.%)
Sorbitan Monostearate	74.3
Cetyltrimethylammonium Bromide	24.8
PVP K-15	0.9
Total	100.0

EXAMPLE 21

A homogeneous mixture of cetyltrimethylammonium bromide (CTAB) and sorbitan monostearate (SMS) is obtained by melting SMS (about 165 g) and mixing CTAB (about 55 g) therein. The solid softener product is prepared from this "co-melt" by one of two methods: (a) cryogenic grinding (at about -78°C) to form a fine powder, or (b) prilling to form particles of particle size of from about 50 to about 500 μ m.

Cryogenic Grinding

The molten mixture is frozen in liquid nitrogen and ground in a Waring blender to a fine powder. The powder is placed in a dessicator and allowed to warm to room temperature, yielding a fine, free flowing powder (granule).

Prilling

The molten mixture (at about 88°C) falls about 1.5 inches at a rate of about 65g/min. onto a heated (about 150°C) rotating (about 2,000 rpm) disk. As the molten material is spun off the disk and air cooled (as it radiates outward), neat-spherical

- 50 -

granule particles form with particle size of from about 50 to about 500 μm .

About 1 g of PVP K-15 powder of average MW of about 10,000 is added to and intimately mixed with about 110 g of the solid particulate softener composition to make the solid, particulate fabric softening composition of Example 21.

This solid, particulate fabric softener can be added directly to the rinse, or can be used to prepare a liquid softener. To make a conventional liquid softener about 111 g of solid particles is dispersed in about 889 g of warm water at about 40°C and vigorously shaken for approximately 5 minutes. Upon cooling, the aqueous product remains in a homogeneous emulsified, or dispersed, state. Addition of this liquid product or the solid, particulate product to the rinse cycle of a washing process provides fabric softening and dye transfer inhibition characteristics.

		<u>Example 22</u>	
<u>Components</u>		<u>(Wt.%)</u>	
	DEQA(1)		60.0
	PGMS(2)		17.4
20	Coconut Choline Ester Chloride		8.6
	PVNO		10.5
	Minor Ingredients		
	(Perfume; Antifoam)		<u>3.5</u>
25	Total		100.0

(1) Di(tallowoxyethyl)dimethyl ammonium chloride.

(2) Polyglycerol monostearate having a trade name of Radasurf® 7248.

EXAMPLE 22

About 60 parts of molten DEQA is mixed with about 8.6 parts of molten coconut choline ester chloride and about 17.4 parts of molten PGMS. About 10.5 parts of powdered PVNO of average molecular weight of about 50,000 is then added. The active mixture is cooled and solidified by pouring onto a metal plate, and then ground. Trace of solvent is removed by a Rotovapor® (about 2 hrs. at about 40-50°C at maximum vacuum). The resulting

- 53 -

III. optionally, from 5% to 40% perfume/cyclodextrin complex, from 10% to 40% of polymeric soil release agent, and a dispensing means which provides for release of an effective amount of the composition to fabrics.

5

4. A solid particulate composition according to Claim 1 comprising:

- I. from 20% to 90%, preferably from 30% to 70%, fabric softening agent;
- 10 II. from 0.1% to 80%, preferably from 0.5% to 25%, dye transfer inhibitor; and
- III. optionally, from 0% to 45% of a dispersing agent.

5. The composition according to Claims 1, 2, 3, and 4 wherein
15 said dye transfer inhibitor is (A) having an average molecular weight of from 500 to 40,000, preferably from 1,000 to 30,000 and (A) is preferably polyvinyl pyrrolidone.

6. The composition according to Claims 1, 2, 3, and 4 wherein
20 said dye transfer inhibitor is (B) having an average molecular weight of from 1,000 to 50,000, preferably from 2,000 to 100,000 and (B) is preferably poly(4-vinylpyridine N-oxide).

7. A method of minimizing dye transfer during the wash cycle of
25 a laundering process comprising the following steps:

- (a) washing a load of fabrics in a wash solution containing a detergent composition;
- (b) rinsing said load of fabrics with an effective amount of the liquid softening composition of Claim 2 or solid,
30 particulate fabric softening composition of Claim 4, preferably which is reconstituted into a liquid composition of Claim 2 or 4;
- (c) drying said load of fabrics in a tumble dryer, and adding an effective amount of the dryer-added softening agent of Claim 3 if an effective amount of softening
35 composition is not used in Step (b); and

- 54 -

- (d) washing all or part of said load of fabrics, together with or without additional fabrics, said load releasing an effective amount of dye transfer inhibitor into a wash solution containing a detergent composition.

5

8. A method of minimizing dye transfer and a method of improving the appearance of fabrics discolored by dye transfer, during the wash cycle of a laundering process by providing an effective amount of water-soluble polymeric dye transfer inhibitor into the wash solution by means other than by adding it as part of a detergent composition wherein said dye transfer inhibitor is selected from the group consisting of:

10


- (A) polymers, which are not enzymes, with one or more monomeric units containing at least one $=N-C(=O)-$ group having an average molecular weight of from 500 to 100,000;
- (B) polymers with one or more monomeric units containing at least one N-oxide group having an average molecular weight of from 500 to 1,000,000;
- (C) polymers containing both $=N-C(=O)-$ and N-oxide groups of (A) and (B); and
- (D) mixtures thereof;

15

20

wherein said dye transfer inhibitor has the structure:

25



30

wherein m is from 0 to 2; n is selected to provide a molecular weight of from 500 to 1,000,000; each P and each D can contain one or more moieties selected from the group consisting of $=N-C(=O)-$, $=N \rightarrow O$, and mixtures thereof, such that said structure provides dye transfer inhibition and has a water solubility of at least 100 ppm; and wherein preferably said wash solution contains at least some colored fabrics which release dyes and contains fabrics which will be discolored by the released dyes.

35

- 55 -

9. A process of making the liquid composition of Claim 2 comprising the following steps:

- (a) melting and mixing the softener active;
- 5 (b) adding dye transfer inhibitor to the water seat, the water seat having a temperature of from 100°F to 190°F;
- (c) adding the mixture of (a) into the water seat with agitation;
- (d) optionally adding a viscosity control agent; and
- 10 (e) cooling the composition.

10. The process of Claim 9 wherein the dye transfer inhibitor is added after Step (c) but before Step (d).

15

INTERNATIONAL SEARCH REPORT

Intern. Application No
PCT/US 93/10451

A. CLASSIFICATION OF SUBJECT MATTER C 11 D 3/37, C 11 D 3/28, C 11 D 3/30, C 11 D 11/00		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) C 11 D		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB, A, 1 079 388 (GENERAL FOODS CORPORATION) 16 August 1967 (16.08.67), example 1.	1
X	DE, A1, 3 803 630 (HENKEL) 17 August 1989 (17.08.89), the whole document.	1
X	EP, A2, 0 203 486 (HENKEL) 03 December 1986 (03.12.86), the whole document.	1
A	WO, A1, 90/06 354 (HENKEL) 14 June 1990 (14.06.90), claims; page 6, lines 11-26.	1, 5, 6
<input type="checkbox"/> Further documents are listed in the continuation of box C.		
<input type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents :		
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>* "A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>* "E" earlier document but published on or after the international filing date</p> <p>* "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>* "O" document referring to an oral disclosure, use, exhibition or other means</p> <p>* "P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>* "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>* "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>* "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>* "&" document member of the same patent family</p> </div> </div>		
Date of the actual completion of the international search <div style="text-align: center; font-weight: bold;">04 February 1994</div>		Date of mailing of the international search report <div style="text-align: center; font-weight: bold;">10. 03. 94</div>
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+ 31-70) 340-3016		Authorized officer <div style="text-align: center; font-weight: bold;">SEIRAFI e.h.</div>

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 93/10451

-2-

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP, A2, 0 262 897 (UNILEVER) 06 April 1988 (06.04.88), abstract. -----	1,5

ANHANG

zum internationalen Recherchen-
bericht über die internationale
Patentanmeldung Nr.

In diesem Anhang sind die Mitglieder
der Patentfamilien der im obenge-
nannten internationalen Recherchenbericht
angeführten Patentedokumente angegeben.
Diese Angaben dienen nur zur Unter-
richtung und erfolgen ohne Gewähr.

ANNEX

to the International Search
Report to the International Patent
Application No.

PCT/US 93/10451 SAE 82168

This Annex lists the patent family
members relating to the patent documents
cited in the above-mentioned inter-
national search report. The Office is
in no way liable for these particulars
which are given merely for the purpose
of information.

ANNEXE

au rapport de recherche inter-
national relatif à la demande de brevet
international n°

La présente annexe indique les
membres de la famille de brevets
relatifs aux documents de brevets cités
dans le rapport de recherche inter-
national visée ci-dessus. Les renseigne-
ments fournis sont donnés à titre indica-
tif et n'engagent pas la responsabilité
de l'Office.

In Recherchenbericht angeführtes Patentedokument Patent document cited in search report Document de brevet cité dans le rapport de recherche	Datum der Veröffentlichung Publication date Date de publication	Mitglied(er) der Patentfamilie Patent family member(s) Membre(s) de la famille de brevets	Datum der Veröffentlichung Publication date Date de publication
GB A 1079388		keine - none - rien	
DE A1 3803630	17-08-89	DK A0 489/89 DK A 489/89 EP A2 327927 EP A3 327927	02-02-89 07-08-89 16-08-89 19-09-90
EP A2 203486	03-12-86	AT E 80653 DE A1 3519012 DE C0 3686737 EP A3 203486 EP B1 203486 ES A1 555276 ES A5 555276 ES A1 8800337 JP A2 61276898 US A 4756849	15-10-92 27-11-86 22-10-92 08-02-89 16-09-92 16-10-87 16-11-87 01-01-88 06-12-86 12-07-88
WD A1 9006354	14-06-90	DE A1 3840056 EP A1 372291	31-05-90 13-06-90
EP A2 262897	06-04-88	AU A1 79047/87 BR A 8705057 CA A1 1302197 EP A3 262897 GB A0 8625102 JP A2 63110293 US A 4954292 GB A0 8623586 ZA A 8707369 GB A0 8623596 GB A1 2198045	14-04-88 24-05-88 02-06-92 07-06-89 26-11-86 14-05-88 04-09-90 05-11-86 30-05-89 05-11-86 08-06-88